

## Product Description:

Watts FD-370 Wood Deck Drain is a 3 component assembly consisting of an epoxy coated wood deck drain with a 5" diameter heel proof aluminum grate and a surface membrane clamp with recessed securing flange and 2" ABS socket outlet. Low profile, flush mount drain design is ideal for solid decking applications with IB PVC Single-Ply and IB DeckShield membranes.

## Sizes:

2"

## Packaging:


Sold in individual units

## Features:

- Low profile, flush mount drain design
- Surface membrane clamp with recessed securing flange and 2" ABS socket outlet
- 5" diameter heel proof aluminum grate

## Load Rating & Free Area:

Load Rating	Free Area (Sq. In.)
*LD	8
Note: The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows: LD – Safe Live Load 7500 – 10000 lbs. (3375-4500 kg) The above categories are given as a guide only.	

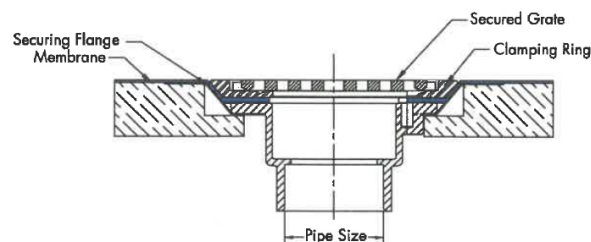

Typical Installation

Refer to IB DeckShield Drain Detail DS-18 for installation instructions.

Product details stated are nominal as manufactured, and the results of tests and/or calculations and are therefore non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.