

## IB 2" Barbed Seam Plate:

The IB 2" Barbed Seam Plate is designed for membrane attachment over wood, plywood, and OSB decks. The plate is placed at designated locations within the membrane seam area and used in conjunction with IB HD #14 or IB XHD #15 Roofing Fasteners.


### Plate Information:

OD: 2"

ID: .256"/.270"

Thickness: .032", 22 gauge

Finish: AZ55 Galvalume



## IB 2-3/8" Barbed Seam Plate:

The IB 2-3/8" Barbed Seam Plate is designed for membrane attachment over concrete, steel, wood, plywood, and OSB decks. The plate is placed at designated locations within the membrane seam area and used in conjunction with IB HD #14, IB XHD #15 Roofing Fasteners, IB Dekspike Concrete Anchors, and IB CD-10 Concrete Fasteners.



### Plate Information:

OD: 2-3/8"

ID: .260"/.262"

Thickness: .038", 20 gauge

Finish: AZ50 Galvalume

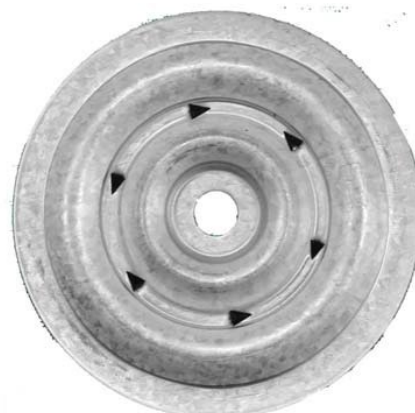

## IB 3" Insulation Plate:

The IB 3" Insulation Plate is designed to secure cover boards and insulation in conjunction with applicable approved IB Insulation/Roofing Fasteners over concrete, steel, metal roof panels, wood, plywood, and OSB decks. The plate is placed at a specified rate and designated locations over the top insulation or cover board.

### Plate Information:

OD: 3"

ID: .260"

Thickness: .019", 26 gauge

Finish: AZ50 Galvalume

### Packaging:

The plates come pre-packaged in a plastic bucket. See table for quantity and weights.

Description	Diameter	Packaging	Weight
2" Barbed Seam Plate	2"	1000	41 lbs.
2-3/8" Barbed Seam Plate	2-3/8"	1000	36 lbs.
3" Insulation Plate	3"	1000	41 lbs.

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

