




Penetrations

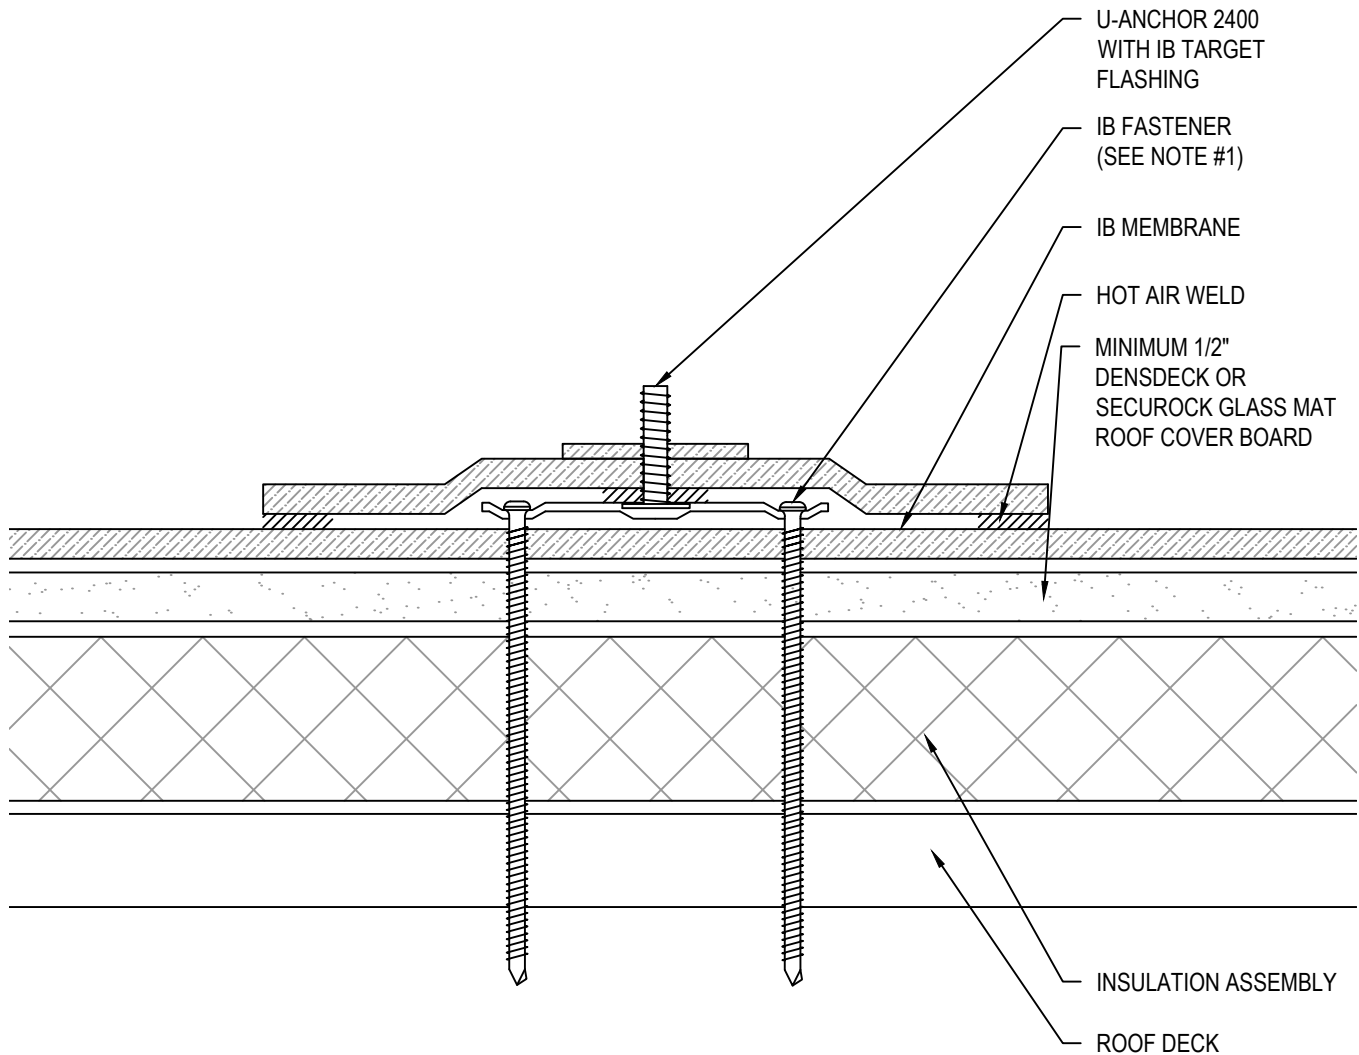

NOTES:

1. APPROVED IB FASTENER APPROPRIATE FOR PROJECT DECK TYPE.
2. FASTENER PULL TESTS RECOMMENDED TO CONFIRM ACCEPTABLE WITHDRAWAL RESISTANCE FASTENERS MUST ENGAGE THE STRUCTURAL DECK OR FRAMING SUPPORTS.
3. INSTALL U-ANCHOR 2400 WITH A MINIMUM OF FOUR (4) IB APPROVED FASTENERS PER PLATE. FASTENERS MUST ENGAGE THE STRUCTURAL DECK OR FRAMING SUPPORTS.
4. U-ANCHOR PLATES INSTALLED ON IB ROOF SYSTEMS WARRANTY PROJECTS ARE CONSIDERED PART OF THE PV SOLAR ASSEMBLY AND ARE NOT A COVERED COMPONENT OF THE IB WARRANTY. RESPONSIBILITY FOR U-ANCHOR AND PV SOLAR ASSEMBLY DESIGN, LOAD CALCULATION, WIND RESISTANCE, ATTACHMENT AND PERFORMANCE REMAINS WITH OTHERS.

Scale: NTS	Detail Name: U-Anchor 2400	Detail Number: PS - 18
Submitted By: Address: Telephone:		Project: Address: