



PRODUCT REFERENCE GUIDE

2025



Quality Products



Exceptional Service



Technical Expertise



More for the Contractor

Enclosed you will find IB products and details you need in order to place orders and get what you need. We are constantly updating the information and have digital versions available online at www.IBroof.com, in the literature section. If you need any additional information, contact your local sales representative or call us at 800.426.1626.

ORDERING PROCEDURES AND DETAILS

For current pricing refer to the current IB price list available from your local IB Representative. This book will be published quarterly; however, orders will be priced accordingly at the time of shipment. This is due to market volatility and our ability to react in due course.

FOR QUOTES, ORDERS, & INQUIRIES

Call - 800.426.1626

Email to Orders.NW@IBroof.com, Orders.SW@IBroof.com, Orders.CT@IBroof.com, or Orders.ET@IBroof.com

Fax to 214-722-0857. – Call to confirm fax received

Hours of Operation:

- Offices: 8:00am - 5:00pm (local)
- Distribution Centers: 7:00am - 3:00pm (local)
- Customer Service available 7:00am and 7:00pm CST

ORDER CUT-OFF TIMES

1:00pm (local time) for LTL and small parcel.

48 Hours' notice required for orders shipping via dedicated/full truck

Note: Please allow 24-48 hours for all custom flashing and metals

ORDER PROCESSING

Please allow 24 to 72 hours for order processing

Shipment delivery of order is 7-10 days

Multiple Purchase Orders shipping together must be sent at the same time. IB cannot guarantee orders will ship together if sent separately.

Freight charges apply to each shipment.

ORDER CHANGES

No order changes within 24 hours – To minimize errors and maintain an efficient workflow, order changes will not be accepted within 24 hours of the scheduled shipping date.

QUOTES

Please contact your local IB representative to obtain quotes for special order items not listed on the price list.

ORDER CONFIRMATION

Once your order is placed, you will receive an email confirmation. Please review this confirmation carefully to ensure all details are accurate, including items, quantities, and shipping location.

For will-call orders, a confirmation will be sent once the order is entered. Our shipping department will notify you when the order is ready for pick-up, and our inside sales team will communicate directly with the representative or customer to coordinate the process.

SHIPPING CONFIRMATION

After your order has shipped, you will receive a shipping confirmation email containing all relevant shipping and tracking information.

We strive to ship your order complete whenever possible. However, if an item is unavailable, an IB Customer Service Representative will contact you to review your options. Please note that insulation, coverboard, and custom orders may ship separately from membranes and other items due to logistics.

BACKORDERS

Backorders are shipped as soon as materials are available. If a backorder is no longer needed, please notify us as soon as possible as IB Roof Systems is not responsible for additional fees required to return and/or issue credit for backorders.

RECEIVING YOUR ORDER

Proper inspection of your shipment upon delivery is crucial. Please follow these guidelines to ensure any issues are addressed promptly:

Shortages & Damages

- Inspect your shipment immediately upon delivery and note any shortages or damages on the driver's paperwork before the driver leaves.
- For shipments delivered without a signature requirement, IB Roof Systems is not liable for damaged or missing material.
- Allow up to 72 hours for carriers to locate any short freight.
- Providing images of damaged materials at the time of delivery will help expedite the claims process.

Concealed Shortages & Damages

- IB Roof Systems accepts notifications of concealed damages or shortages within 30 days of receipt of delivery if credit is being requested.

2025 FREIGHT POLICY

Fulfillment Expectation

IB Roof Systems has been ambitious to build a network where your order can ship the same day or next from the regional IB distribution center closest to you or your project. IB has multiple shipping options that include truckload orders to small package.

Expectations of Customer Freight Charges

Small Parcel/UPS: Shipping is charged at the time of shipment.

LTL (Less Than Truckload): up to 4 Pallets

- Freight surcharge of \$50 applies to each LTL Shipment.
- LTL Freight is charged at the time of shipment & subject to additional fees as noted below.
- **Overlength, appointment, residential, limited access, liftgate/ pallet jack, etc.

FTL (Full Truckload) Embedded Freight: greater than 4 Pallets

- Included Materials: Membrane, Accessories, Coatings, Adhesives, Metals
- *Additional Surcharges:
- ** \$450.00 freight surcharge
- ** \$100.00 per stop fee (for multiple pickups/deliveries)
- ** \$100.00 per day hold fee (for extended transit)
- ** Special equipment fees (e.g., liftgate, pallet jack) charged at cost

Deficit Freight Charges:

- If a truck is not fully utilized (e.g., unused space or maximum weight reached), the following deficit charges will apply:
 - ** Empty to ¼ full: \$1,000.00
 - ** ¼ to ½ full: \$700.00
 - ** ½ to ¾ full: \$400.00
 - ** Full truck: \$0.00

FOR ORDERS EXCEEDING 400 SQUARES, IB Roof Systems may require up to 48 hours for processing. These orders will ship directly from our centralized distribution hub in Grapevine, TX, to your designated location or job site.

For any questions regarding our freight policy, please contact IB Roof Systems at:

- Phone: 800-426-1626
- Email: shipping@ibroof.com

TABLE OF CONTENTS

Membranes

IB PVC Single-Ply 50.....	6
IB PVC Single-Ply 60.....	6
IB PVC Single-Ply 80.....	6
IB PVC Single-Ply Fleece Back 50.....	6
IB PVC Single-Ply Fleece Back 60.....	6
IB PVC Single-Ply Fleece Back 80.....	6
IB PVC Single-Ply ChemGuard™ 50.....	7
IB PVC Single-Ply ChemGuard™ 60.....	7
IB PVC Single-Ply ChemGuard™ 80.....	7
IB DeckShield.....	7
IB Walk Tread.....	7
CrossGrip.....	7
Rooftop Address.....	7

Insulation / Coverboard / Separation

IB Energy Board II.....	8
IB Energy Board II Tapered.....	8
IB Energy Board III.....	8
IB Energy Board III Tapered.....	8
FanFold Roof Underlayment.....	9
IB HD ISO CoverBoard.....	9
EPS Insulation.....	9
DEXcell Roof Board.....	9
DensDeck Roof Board.....	10
DensDeck Prime Roof Board.....	10
DensDeck Storm X Prime.....	10
Securock Ultralight Glass-Mat Roof Board....	10
Securock Gypsum-Fiber Roof Board.....	10
IB Separator Sheet.....	11
IB Poly Separator Sheet.....	11
IB HD Poly Separator Sheet.....	11
IBarrier SA Membrane.....	11
IBarrier SA Membrane VP.....	11
IBarrier SA Membrane XP.....	11
IB Fire Sheet 10.....	11

Plates & Fasteners

2" Barbed Seam Plates.....	12
2 3/8" Barbed Seam Plates.....	12
2" Gyptec Insulation Plates.....	12
3" Insulation Plates.....	12
IB ISOweld Plates.....	12
TPA Sleeve.....	12
AccuSeam Plates.....	12
AccuTrac Plates.....	12
RhinoBond Plates.....	12
IB SD #12 Insulation Fastener.....	13
IB HD #14 Roofing Fastener.....	13

Plates & Fasteners

IB XHD #15 Roofing Fastener.....	13
#12 Purlin Fastener.....	13
Gyptec Roofing Fastener.....	14
Zinc Nail-ins.....	14
ZAC Anchors.....	14
Banding Clamps.....	14
Band-It-Clips.....	14
Band-It-Strap.....	14
Band-It Tension Tool.....	14
Band-It Scru Seal Adjustable Clamps.....	14

Adhesives

IB Water Borne Adhesive.....	15
IB Water Borne Adhesive 636.....	15
IB Vertibond Adhesive.....	15
IB Vertibond Adhesive 432.....	15
1-Part Pourable Penetration Sealant.....	15
IB Water Stop.....	15
Millennium Universal Primer.....	16
Millennium PG-1.....	16
IB Rapid Set Insulation Adhesive.....	16
Olybond 500 SpotShot.....	16
IBarrier Primer.....	16
IB Prime LVOC.....	16
M-1 Sealant.....	17
Millennium PG-1 EF ECO Adhesive.....	17
Duralink 35.....	17
Millennium PVC Spray Contact Adhesive.....	17
Olybond 500 Tanks...LR Foam Adhesive.....	17
IB PMMA Liquid Flashing Resin.....	18
IB PMMA Horizontal Resin.....	18
IB PMMA Catalyst Gel.....	18
IB PMMA Fleece.....	18
IB PMMA Universal Primer Blue.....	18

Flashings & Vents

Non-Reinforced Detail Flashing Roll.....	19
IB Cover Strip.....	19
Flexible Metal Profile.....	19
IB Non-Reinforced 5" x 8" Metal Joint Patch....	19
Foil Tape.....	19
Short A Cone.....	20
Split Short A Cone.....	20
A Cone.....	20
B Cone.....	20
C Cone.....	21
D Cone.....	21
E Cone.....	21

TABLE OF CONTENTS
Flashings & Vents

0 to 5 Cone - 4".....	21
0 to 5 Cone - 6".....	22
0 to 5 Cone - 8".....	22
Oval 0 to 5 Cone - 4".....	22
Universal Outside Corner.....	22
Inside Corner.....	23
Outside Corner.....	23
Round T-Joint Patch.....	23
IB Pitch Pan.....	23
U-Anchor 1400.....	24
U-Anchor 2000.....	24
U-Anchor 2400.....	24
U-Anchor 3400.....	25
U-Anchor 4400.....	25
U-Anchor Fall Protection System.....	25
U-Anchor Snow Fence Retention Systems....	25
E-Curb Kits - 4" Round.....	26
E-Curb Kits - 6" Round.....	26
IB Recover Membrane Vent.....	26
IB 10" Roof Vent.....	26
IB Dryer Vent/Exhaust Vent & Vent No-Cone..	27

Drains

2" IB Retrofit Drain & Target.....	28
3" IB Retrofit Drain & Target.....	28
4" IB Retrofit Drain & Target.....	28
5" IB Retrofit Drain & Target.....	28
6" IB Retrofit Drain & Target.....	29
2" IB Retrofit Overflow Drain & Target.....	29
3" IB Retrofit Overflow Drain & Target.....	29
4" IB Retrofit Overflow Drain & Target.....	29
5" IB Retrofit Overflow Drain & Target.....	30
6" IB Retrofit Overflow Drain & Target.....	30
2" IB Drain Liner & Drop Scupper.....	31
3" IB Drain Liner & Drop Scupper.....	31
4" IB Drain Liner & Drop Scupper.....	31
2" IB Wood Deck Drain.....	31

Metals

IB Clad Drip Edge Metal.....	32
IB Clad Drip Edge Stainless Steel Metal.....	32
IB Clad Gravel Stop Metal.....	32
IB Clad Gravel Stop Stainless Steel Metal.....	32
AnchorTite® Drip Edge.....	32
IB PVC Clad Metal 4 x 10 Sheet.....	32
IB Metal Cleat.....	33
IB Stainless Steel Cleat.....	33
IB Aluminum Termination Bar.....	33
IB Clad Termination Bar.....	33

Customs

Post Flashing 0-30" (small).....	33
Post Flashing 31-42" (medium).....	33
Post Flashing 43-50" (large).....	33
Post Flashing 51"+ (extra large).....	33
Custom Cone Flashings 0-15" (small).....	34
Custom Cone Flashings 16-22" (medium).....	34
Custom Cone Flashings 23-26" (large).....	34
Custom Cone Flashings 27-29" (xlarge).....	34
Custom Cone Flashings 30-32" (xxlarge).....	34
Custom Cone Flashings 33-36" (MG-small).....	34
Custom Cone Flashings 37-39" (MG-medium)	34
Custom Cone Flashings 40-44" (MG-large).....	34
Custom Cone Flashings 45-47" (MG-xlarge)....	34
Custom Overflow Scupper 0-20" (small).....	34
Custom Overflow Scupper 21-25" (medium). ..	34
Custom Overflow Scupper 26-30" (large).....	34
Custom Overflow Scupper 31-35" (xlarge).....	34
Custom Overflow Scupper 36-40" (xxlarge).....	34
Custom Overflow Scupper 46-50" (MG-small).....	34
Custom Overflow Scupper 41-45" (MG-medium).34	
Custom Overflow Scupper 51-55" (MG-large)....	34
Custom Overflow Scupper 56-60" (MG-xlarge)...	34
Custom Through Wall Scupper 0-20" (small).....	35
Custom Through Wall Scupper 21-25" (medium)...	35
Custom Through Wall Scupper 26-30" (large).....	35
Custom Through Wall Scupper 31-35" (xlarge)....	35
Custom Through Wall Scupper 36-40" (xxlarge)....	35
Custom Through Wall Scupper 41-45" (MG-small)..35	
Custom Through Wall Scupper 46-50" (MG-medium)..35	
Custom Through Wall Scupper 51-55" (MG-large).....	35
Custom Through Wall Scupper 56-60" (MG-xlarge)....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 0-20" (small).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 21-25" (medium).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 26-30" (large).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 31-35" (xlarge).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 36-40" (xxlarge).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 41-45" (MG-small).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 46-50" (MG-medium).....	35
Custom 2 Sided Through Wall Scupper w/Clad Drop 51-55" (MG-large).....	35

TABLE OF CONTENTS

Customs

Custom 2 Sided Through Wall Scupper
w/Clad Drop 56-60" (MG-xlarge)..... 35

Custom Drain Liner 0-12" (small)..... 36

Custom Drain Liner 13-14" (medium)..... 36

Custom Drain Liner 15-16" (large)..... 36

Custom Drain Liner 17-18" (xlarge)..... 36

Custom PVC Clad Metal..... 36

Custom PVC Clad Stainless Metal..... 36

Custom PVC Clad Metal Color..... 36

Custom Cleat Metal..... 36

Custom Cleat Stainless Metal..... 36

Custom Clad Metal Drop Scrubber
Round 0-4" small..... 36

Custom Clad Metal Drop Scrubber
Round 5-7" medium..... 36

Custom Clad Metal Drop Scrubber
Round 8-10" large..... 36

Custom IB Pitch Pan 0-12" (small)..... 37

Custom IB Pitch Pan 13-16" (medium)..... 37

Custom IB Pitch Pan 17-20" (large)..... 37

Custom IB Pitch Pan 21-24" (xlarge)..... 37

Custom IB Pitch Pan 25-28" (xxlarge)..... 37

Custom IB Pitch Pan 29-32" (MG-small)..... 37

Custom IB Pitch Pan 33-36" (MG-medium)..... 37

Custom IB Pitch Pan 37-40" (MG-large)..... 37

Custom IB Pitch Pan 41-44" (MG-xlarge)..... 37

Coatings

IB Silicone..... 38

IB Silicone FG..... 38

IB Sealer..... 38

IB Acrylic SW..... 39

IB Acrylic FG..... 39

IB Acrylic Pro..... 39

IB Urethane Base Coat..... 40

IB Urethane Finish Coat..... 40

IB Urethane Metal Primer..... 40

IB Uni-Prime..... 40

IB Seam Set..... 40

IB Bleed Block..... 41

IB Rust Primer..... 41

IB Roof Cleaner Wash Concentrate..... 41

IB Fabric..... 41

Tools

Isoweld® Tool 42

Isoweld® Tool Magnets, Set of 12..... 42

Leister 120V Uniroof AT w/Case..... 42

Leister 230V Uniroof AT w/Case..... 42

Isoweld® Backpack Took..... 42

Leister V2 Varimat Auto Welder w/Case..... 42

Winco 12K Generator..... 42

Leister 110v Hand Welder ST..... 43

Leister Hand Welder Nozzle 40mm..... 43

Leister Hand Welder Nozzle 20mm..... 43

Leister 220V Varimat Cord..... 43

IB Hand Welder Kit..... 43

IB Hand Welder Bag Only..... 43

Membrane Shears..... 43

Seam Probe..... 43

Flexible Metal Profile/Rib Autowelder Kit..... 43

IB Battery Powered Millennium Applicator..... 44

IB Manual Millennium Heavy Duty Applicator..... 44

Millennium Spray Applicator..... 44

Millennium Extended Spray Applicator..... 44

Millennium Applicator Tip..... 44

Millennium Flush Solution..... 44

Millennium Steel Hose, 12ft..... 44

Membrane Slitter..... 45

2" Silicone Hand Roller..... 45

IB Retrofit Drain Screwdriver..... 45

IB Bag of Rags..... 45

Hand Welder Element 120V 1600W-S..... 45

Hand Welder Element 120V 1550W-ST..... 45

Order Contact Info..... 46

Install Video info..... 47


Sample Info..... 47

Return Policy..... 48

Freight Policy..... 49

MEMBRANES

IB® PVC Single-Ply 50



Polyester scrim reinforced, compounded PVC resin-based sheet with plasticizers, stabilizers, fillers, pigments, and other proprietary materials meeting ASTM D4434, Type III. An anti-wicking scrim is applied for added strength, tear resistance and enhanced moisture resistance.

Product No	Roll Size	Color
1-50W	50 Mil 6'	White
1-505W	50 Mil 3'	White
1-50G	50 Mil 6'	Gray
1-505G	50 Mil 3'	Gray
1-50T	50 Mil 6'	Tan
1-505T	50 Mil 3'	Tan

Packaging:

Size	Sq Ft	Weight (lbs)	Pallet
6' x 90'	540	175 per roll	12
3' x 90'	270	88 per roll	24


Features:

- 24 mil top ply weathering film
- Helps reduce heat transfer through roof into the building's interior



*CRRC

IB® PVC Single-Ply 80



Polyester scrim reinforced, compounded PVC resin-based sheet with plasticizers, stabilizers, fillers, pigments, and other proprietary materials meeting ASTM D4434, Type III. An anti-wicking scrim is applied for added strength, tear resistance and enhanced moisture resistance.

Product No	Roll Size	Color
1-80W60	80 Mil 6'	White
1-805W60	80 Mil 3'	White
1-80G60	80 Mil 6'	Gray
1-805G60	80 Mil 3'	Gray
1-80BNZ60	80 Mil 6'	Bronze
1-805BNZ60	80 Mil 3'	Bronze
1-80TC60	80 Mil 6'	Terra Cotta*
1-805TC60	80 Mil 3'	Terra Cotta*

Packaging:

Size	Sq Ft	Weight (lbs)	Pallet
6' x 60'	360	191 per roll	12
3' x 60'	180	96 per roll	24

*Special Order


Features:

- 38 mil top ply weathering film
- Helps reduce heat transfer through roof into the building's interior



*CRRC

IB® PVC Single-Ply 60



Polyester scrim reinforced, compounded PVC resin-based sheet with plasticizers, stabilizers, fillers, pigments, and other proprietary materials meeting ASTM D4434, Type III. An anti-wicking scrim is applied for added strength, tear resistance and enhanced moisture resistance.

Product No	Roll Size	Color
1-60W	60 Mil 6'	White
1-605W	60 Mil 3'	White
1-60G	60 Mil 6'	Gray
1-605G	60 Mil 3'	Gray
1-60T	60 Mil 6'	Tan
1-605T	60 Mil 3'	Tan
1-60BNZ	60 Mil 6'	Bronze
1-605BNZ	60 Mil 3'	Bronze
1-60TC	60 Mil 6'	Terra Cotta
1-605TC	60 Mil 3'	Terra Cotta
1-60S	60 Mil 6'	Cool Sand*
1-605S	60 Mil 3'	Cool Sand*
1-60STO	60 Mil 6'	Cool Stone*
1-605STO	60 Mil 3'	Cool Stone*

Packaging:

Size	Sq Ft	Weight (lbs)	Pallet
6' x 90'	540	217 per roll	12
3' x 90'	270	109 per roll	24

*Ships from NV and/or TX

Features:

- 28 mil top ply weathering film
- Helps reduce heat transfer through roof into the building's interior




*CRRC

*CRRC

*CRRC

IB® PVC Single-Ply Fleece Back



Polyester scrim reinforced, compounded PVC resin-based sheet with plasticizers, stabilizers, fillers, pigments, and other proprietary materials meeting ASTM D4434, Type III. The underside of the membrane has a tough polyester fleece backing compatible with both adhered and mechanically fastened applications.


Product No.	Roll Size	Color
1-50WFB	50 Mil FB 6'	White
1-60WFB	60 Mil FB 6'	White
1-80WFB	80 Mil FB 6'	White

Packaging:

Size	Sq Ft	Weight (lbs)	Pallet
50 Mil Rolls			
6' x 90'	540	192 per Roll	10
60 Mil Rolls			
6' x 90'	540	234 per Roll	10
80 Mil Rolls			
6' x 60'	360	200 per Roll	10

Features:


- 50 mil - 24 mil top ply weathering film
- 60 mil - 28 mil top ply weathering film
- 80 mil - 38 mil top ply weathering film
- Helps reduce heat transfer through roof into the building's interior
- Excellent flexibility in all climates



SINGLE-PLY MEMBRANES

MEMBRANES

IB® PVC Single-Ply ChemGuard™



Polyester scrim reinforced, compounded PVC resin-based sheet with DuPont® Elvaloy® KEE, plasticizers, stabilizers, fillers, pigments, and other proprietary materials meeting ASTM D4434, Type III.


Product No.	Roll Size	Color
1-50CGW	50 Mil CG 6'	White
1-505CGW	50 Mil CG 3'	White
1-60CGW	60 Mil CG 6'	White
1-605CGW	60 Mil CG 3'	White
1-80CGW60	80 Mil CG 6'	White
1-80CGW60	80 Mil CG 3'	White

Packaging: Size	Sq Ft	Weight (lbs)	Pallet
50 Mil Rolls			
6' x 90'	540	175 per Roll	12
3' x 90'	270	96 per Roll	24
60 Mil Rolls			
6' x 90'	540	220 per Roll	12
3' x 90'	270	110 per Roll	24
80 Mil Rolls			
6' x 60'	360	191 per Roll	12
3' x 60'	180	96 per Roll	24

- Features:**
- 38 mil top ply weathering film
 - Helps reduce heat transfer through roof into the building's interior
 - ChemGuard™ is a specially designed chemical resistant CPA membrane for industrial and restaurant applications.

Colors: White

IB® DeckShield



DeckShield™ is a dual-ply embossed and printed vinyl sheet that is laminated to a non-woven polyester fleece backing. Specifically designed for residential exterior walkways, patios, decks, balconies, stairways, around swimming pools, hot tubs, and locker rooms.

Product No.	Roll Size	Color
1-60DSFBRO	60 Mil 6' x 75'	Royal Oak (Tan Wood)
1-60DSFBSM	60 Mil 6' x 75'	Silver Maple (Gray Wood)
1-60DSFBSC	60 Mil 6' x 75'	Cobblestone (Tan Stone)
1-60DSFBPS	60 Mil 6' x 75'	Pebblestone (Gray Stone)

by the linear foot pricing is available at \$23.00/LF


Packaging: Size	Sq Ft	Weight (lbs)	Pallet
6' x 75'	450	180 per Roll	9

- Features:**
- Skid-resistant waterproofing
 - Available in a roll for easy layout and installation
 - Colors are fade resistant
 - Suitable for all types of climates

Colors: Pebble Stone Cobble Stone Silver Maple Royal Oak

- *Note:**
- Standard/Non-Fleece back sold per linear foot.
 - Fleece-back sold by full roll only.

IB Walk Tread



80 mil calendared and embossed PVC walk tread with a reinforced scrim backing that can be installed either fully adhered and perimeter welded or loose laid and perimeter welded to an IB PVC Single-Ply Membrane system.


Product No.	Roll Size	Color
1-3GWP100	3' x 60'	Gray

Packaging: Size	Sq Ft	Weight (lbs)	Pallet
3' x 60'	180	105 per roll	15

- Features:**
- Raised pyramid traction surfacing in gray color
 - Available in a roll for easy layout and installation
 - Heat welds directly to membrane
 - Can be fully adhered or loose-laid

Colors: Gray

CrossGrip



Slip resistant walkway system for high traffic roof-top areas. It is ideal for roof and worker protection in high maintenance rooftop areas, where access for installation and maintenance of solar power systems, HVAC, telecommunications, and auxiliary equipment is necessary.
*Ships from NV

Product No.	Roll Size	Color
1-3CROSSGRIPBLK	3' x 33'	Black

***Special Order**

1-3CROSSGRIPG*	3' x 33'	Gray
1-3CROSSGRIPW*	3' x 33'	White
1-3CROSSGRIPY*	3' x 33'	Yellow

Packaging: Size	Sq Ft	Weight (lbs)	Pallet
3' x 33'	99	129 each	48

- Features:**
- Open grid "duckboard" design with cross directional top ribs
 - Durable one-piece welded construction for long life and minimal maintenance
 - Excellent slip resistance

Colors: Black White Yellow Gray

*Available in White, Gray, and Yellow upon request with a minimum order (MOQ) of 48 Rolls.
*Can Mix & Match colors

*Can Mix & Match colors

Rooftop Address



Rooftop Address letters and numbers made from 60 mil IB PVC Single Ply Membrane cut to meet State of California requirements for roof top addresses.

- Use:**
- Great for roof top aerial advertising
 - Heat welds directly to membrane

Product No.	Letter Size
1-LETTER#	6'H x 3' W
1-LETTER#XL	12'H x 6' W

*Made to Order

Colors: White Cool Sand Cool Stone Tan Gray Bronze Terra Cotta

INSULATION / COVERBOARD / SEPARATION

IB Energy Board II



Closed-cell polyisocyanurate foam core integrally bonded to non-asphaltic, fiber-reinforced organic felt facers.

Call for Quote

Product No.	Board Size	Product No.	Board Size
3-01ISO	1' x 4' x 8'	3-01ISO4	1' x 4' x 4'
3-015ISO	1.5' x 4' x 8'	3-015ISO4	1.5' x 4' x 4'
3-02ISO	2' x 4' x 8'	3-02ISO4	2' x 4' x 4'
3-022ISO	2.2' x 4' x 8'	3-022ISO4	2.2' x 4' x 4'
3-025ISO	2.5' x 4' x 8'	3-025ISO4	2.5' x 4' x 4'
3-026ISO	2.6' x 4' x 8'	3-026ISO4	2.6' x 4' x 4'
3-03ISO	3' x 4' x 8'	3-03ISO4	3' x 4' x 4'
3-04ISO	4' x 4' x 8'	3-04ISO4	4' x 4' x 4'

Packaging:

Size	Thickness	Weight (lbs)	Sq Ft
4' x 8'	Various Thickness	Call for Specs	32
4' x 4'	Various Thickness	Call for Specs	16

Features:

- Excellent LTTR to thickness ratio
- Sustainable Building Material
- Reduces cooling and heating loss transmission through roofing assemblies
- Zero Ozone Depletion Potential (ODP)
- Virtually no Global Warming Potential (GWP)*
- Covered component under the IB Total Systems Warranty

IB Energy Board III



Closed-cell polyisocyanurate foam core integrally bonded to non-asphaltic, glass coated felt facers. Taper offered in a variety of slopes, to achieve positive drainage.

Call for Quote

Product No	Board Size
3-ISOE3	4' x 8' & 4' x 4'

*Special Order

Packaging:

Size	Thickness	Weight (lbs)	Sq Ft
4' x 8'	Various Thickness	Call for Specs	32
4' x 4'	Various Thickness	Call for Specs	16

Features:

- Excellent LTTR to thickness ratio
- Sustainable Building Material
- Reduces cooling and heating loss transmission through roofing assemblies
- Zero Ozone Depletion Potential (ODP)
- Virtually no Global Warming Potential (GWP)*
- Covered component under the IB Total Systems Warranty

IB Energy Board II Tapered



Closed-cell polyisocyanurate foam core integrally bonded to non-asphaltic, fiber-reinforced organic felt facers. Taper offered in a variety of slopes, to achieve positive drainage.

Call for Quote

Product No	Board Size
3-ISOEBT	4' x 4'

*Special Order

Packaging:

Size	Slope	Thickness	Weight (lbs)	Sq Ft
4' x 4'	1/8", 1/4", 1/2"	0.5" - 2.5"	Call for Specs	16

Features:

- Excellent LTTR to thickness ratio
- Sustainable Building Material
- Reduces cooling and heating loss transmission through roofing assemblies
- Zero Ozone Depletion Potential (ODP)
- Virtually no Global Warming Potential (GWP)*
- Covered component under the IB Total Systems Warranty

IB Energy Board III Tapered



Closed-cell polyisocyanurate foam core integrally bonded to non-asphaltic, glass coated felt facers. Taper offered in a variety of slopes, to achieve positive drainage.

Call for Quote

Product No	Board Size
3-ISOEB3T	4' x 4'

*Special Order

Packaging:

Size	Slope	Thickness	Weight (lbs)	Sq Ft
4' x 4'	1/8", 1/4", 1/2"	0.5" - 2.5"	Call for Specs	16

Features:

- Excellent LTTR to thickness ratio
- Sustainable Building Material
- Reduces cooling and heating loss transmission through roofing assemblies
- Zero Ozone Depletion Potential (ODP)
- Virtually no Global Warming Potential (GWP)*
- Covered component under the IB Total Systems Warranty

IB HD ISO CoverBoard



A ½" thick high density closed cell polyisocyanurate foam core panel specifically designed to uses as a cover board.

***Call for Quote**

Product No.	Board Size
3-05HD	4' x 8'
3-05HD4	4' x 4'
3-05HDBLK*	4' x 4' & 4' x 8'


Packaging:

Size	Thickness	Weight (lbs)	Sq Ft	Pallet	
4' x 8'	1/2"	0.5 lb/sf	32	45	*Special Order
4' x 4'	1/2"		16	90	*3-05HDBLK for Mechanically attached systems only

Features:

- High Performance Coated Glass Facer
- 2.5 Average LTTR
- Contains no CFCs, HFCs, HCFCs blowing agents
- Zero Ozone Depletion Potential (ODP)
- Virtually no Global Warming Potential (GWP)*
- Factory Mutual rated for severe hail
- Covered Component under the IB Total Systems Warranty

Fan-Fold EPS Recover Board



Made of a high performance rigid insulation consisting of a superior closedcell, lightweight and resilient expanded polystyrene (EPS) with advanced polymeric laminate facers.

Call for Quote on Large Orders

Product No.	Panel Size	Sq Ft
3-05FF	2' x 4' x 50'	200
	200sf	


Packaging:

Size	Thickness	Weight (lbs)
1/2" x 4' x 50'	1/2"	18 per bundle

Features:

- Reduces installation labor
- Retains thermal properties
- Lightweight
- High resistance to moisture
- Polymeric laminate facers
- 1.5 lb Density

EPS/FluteFill & Tapered Insulation



EPS/Flute-Fill is made of a high performance rigid insulation consisting of a superior closed cell, lightweight and resilient expanded polystyrene (EPS). EPS boards have stable R-value, excellent dimensional stability, compressive strength, and water-resistant properties.

Product No	Roll Size
3-EPSRI – Standard Flat Stock	Custom Size
3-EPSRIT – Tapered EPS	Custom Size

*Special Order

Packaging:

Size	Thickness	Weight (lbs)	Pallet
4' x 8' & 4' x 4'	1/4"		

DEXcell Roof Boards



Durable, lightweight roof underlayment panels designed to enhance roof performance and longevity.

Features:

- Moisture & Mold Resistance
- Lightweight & Easy Handling
- Superior Dimensional Stability
- Versatile Application

Product No.	Type	Board Size
3-14DEXGM	GlassMat	1/4" x 4' x 8'
3-12DEXGM	GlassMat	1/2" x 4' x 8'
3-58DEXGM	GlassMat	5/8" x 4' x 8'
3-14DEXFAGM4	FA GlassMat	1/4" x 4' x 4'
3-14DEXFAGM	FA GlassMat	1/4" x 4' x 8'
3-12DEXFAGM4	FA GlassMat	1/2" x 4' x 4'
3-12DEXFAGM	FA GlassMat	1/2" x 4' x 8'
3-58DEXFAGM4	FA GlassMat	5/8" x 4' x 4'
3-58DEXFAGM	FA GlassMat	5/8" x 4' x 8'
3-58DEXCEM4	Cement Board	5/8" x 4' x 4'
3-58DEXCEM	Cement Board	5/8" x 4' x 8'
3-716DEXCEM4	Cement Board	7/16" x 4' x 4'
3-716DEXCEM	Cement Board	7/16" x 4' x 8'

Packaging:

Size	Thickness	Weight (lbs)	Sq Ft
4' x 8'	Various Thickness	Call for Specs	32
4' x 4'	Various Thickness	Call for Specs	16

INSULATION / COVERBOARD / SEPARATION

Securock Gypsum-Fiber Roof Board



This high performance roof board has a unique, fiber-reinforced, homogeneous composition gives the panel strength and water resistance to the core. Achieves high wind uplift ratings with no risk of facer delamination.

Call for Quote

Product No.	Board Size
3-SR.25	4' x 8'
3-SR375	4' x 8'
3-SR.5	4' x 8'
3-SR625	4' x 8'

Packaging:

Thickness	Weight (lbs)	Sq Ft	Pallet
1/4"	1.57	32	50
3/8"	2	32	40
1/2"	2.76	32	30
5/8"	3.2	32	24

Features:

- Superior wind-uplift performance for a wide variety of roof systems
- Excellent fire performance and surface burning characteristics
- Integral water-resistant core ensures moisture and mold resistance

Securock Ultralight Coated Glass-Mat Roof Board



This high-performance roof board enhances the durability of the entire roofing system when used as cover board in single-ply mechanically attached systems. Its specifically treated core and high-performance glass-mat facer provide protection against fire, mold and moisture.

Call for Quote

Product No.	Board Size
3-SRGM.25	4' x 8'
3-SRGM.5	4' x 8'
3-SRGM625	4' x 8'

Packaging:

Size	Thickness	Weight (lbs)	Sq Ft	Pallet
4' x 8'	1/4"	1.2	32	42
4' x 8'	1/2"	2	32	30
4' x 8'	5/8"	2.7	32	24

Features:

- Fire Performance: Meets Factory Mutual (FM) Class 1 and Underwriters Laboratories (UL) Class A fire ratings for unlimited slope in fire barrier applications per UL 790.
- Easier to cut, handle, and install: High-quality mat produces less itchiness than competitive products.
- Moisture and Mold: Fiberglass face and back with treated core provides moisture and mold resistance. Scored a maximum "10" for mold resistance on ASTM D3273.

DensDeck Roof Board



An exceptional fire barrier, thermal barrier, cover board and recovery board used in various roofing systems. The design employs fiberglass mat facers that are mechanically bonded to a high-density gypsum core, providing excellent fire resistance and wind uplift properties.

Call for Quote

Product No.	Board Size
3-DD25U	4' x 8'
3-DD05U	4' x 8'
3-DD625U	4' x 8'


Packaging:

Size	Thickness	Weight (lbs)	Sq Ft	Pallet
4' x 8'	1/4"	1.2	32	42
4' x 8'	1/2"	2	32	30
4' x 8'	5/8"	2.5	32	30

Features:

- UL code ratings available
- FM Approved
- Excellent wind uplift ratings
- Resistant to deterioration, warping, and job-site damage

DensDeck Prime Roof Board



An exceptional fire barrier, thermal barrier, cover board and recovery board used in various roofing systems. The facer is enhanced to allow adhesives to be applied more uniformly and consistently. Creates a stronger and more economical installation by reducing the amounts of adhesive used and potentially eliminate primers.

Call for Quote

Product No.	Board Size
3-DD25	4' x 8'
3-DD05	4' x 8'
3-DD625	4' x 8'


Packaging:

Size	Thickness	Weight (lbs)	Sq Ft	Pallet
4' x 8'	1/4"	1.2	32	42
4' x 8'	1/2"	2	32	30
4' x 8'	5/8"	2.5	32	30

Features:

- UL code ratings available
- FM Approved
- Wind uplift ratings
- Resistant to deterioration, warping, and job-site damage

DensDeck Storm X Prime



DensDeck® StormX™ Prime Roof Board is a reinforced gypsum panel with an enhanced moisture-resistant core and coated glass mat facers and through use of GP's patented EONIC™ Technology maintains a high level of moisture resistance.

Call for Quote

Product No.	Board Size	Thickness
3-DDSX625	4' x 8'	5/8"
3-DDSX6254	4' x 8'	5/8"

*Special Order

Features:

- UL code ratings available for high slopes and wood decks
- FM Approved
- Improves resistance to foot traffic and hail damage
- Excellent wind uplift ratings
- Resistant to deterioration and warping
- Covered component under the IB Total Systems Warranty

INSULATION / COVERBOARD / SEPARATION

IB Separator Sheet



High strength, polypropylene scrim reinforced fabric with polypropylene coating on both sides. Used as a separation sheet beneath membranes to resist contaminant, residue transfer and moisture from existing substrates.


Product No	Roll Size
3-01SEP	5' 10" x 515' 3004sf

Packaging:	Size	Thickness	Weight (lbs)	Pallet
	5' 10" x 515'	Call for Specs	78 per roll	30

Use:

- General duty separation layer between compatible and non-compatible roofing components

IB Poly Separator Sheet




Polyester based woven fiber sheet. Used as a separation layer between IB membranes and incompatible or contaminated materials and surfaces. It can also serve as a protection layer between overburden items such as stone ballast, wood decking, pavers, etc.

Product No	Roll Size
3-045SS36	7' 6" x 360' 2,700sf

Packaging:	Size	Thickness	Weight (lbs)	Pallet
	7' 6" x 360'		85 per roll	12

IB HD Poly Separator Sheet



Heavy duty 16 oz polyester based woven fiber sheet. Used as a divorcing layer between membranes and incompatible or contaminated materials and surfaces. Can also service as a protection layer between overburden items. Ideal cushioning layer for ballasted assemblies over concrete decks.

Product No	Roll Size
3-016SS	7' 6" x 150' 1125sf

Packaging:	Size	Weight (lbs)	Pallet
	7' 6" x 150'	135 per roll	10

IB Fire Sheet 10



Constructed using a strong fiber-glass core mat that is coated with a specially formulated acrylic coating that can be installed as the first layer directly over a roof deck.

Product No	Roll Size
3-0FR10	4' x 250' 1000sf

Packaging:	Size	Thickness	Weight (lbs)	Pallet
	4' x 250'		97 per roll	20

Features:

- Approved separation layer between insulations
- Effective barrier between EPS and XEPS insulation and PVC membranes
- Superior thermal barrier value

IBarrier SA Membrane



Self-adhesive membrane composed of SBS modified bitumen on the bottom surface and a tri-laminated woven polyethylene facer.

**NOTE: See page 16 for IBarrier Primer

Product No.	Roll Size	Coverage w/3" Lap
3-02IBSS	3'9" x 134'	468sf

Packaging:	Size	Sq Ft	Weight (lbs)	Pallet
	3-02IBSS 3'9" x 134'	533	77 per Roll	25

Features:

- High resistance to foot traffic
- Self-sealing air barrier/vapor retarder
- Ideal for use with mechanically fastened insulated systems
- No primer required for installation on new steel decks
- Compatible with 2-component insulation adhesives
- Suitable for use with wood, steel, structural concrete, and gypsum decks

IBarrier SA Membrane VP & XP



A self-adhering, non-asphaltic, high-temperature air and vapor barrier membrane designed for superior performance in both roofing and wall applications. Featuring a 30 Perm rating, it provides exceptional vapor permeability while maintaining a 180-day roof exposure limit.

Features:

- Impermeable to air, water, and vapor
- Compatible with many building sealants
- Installs in below freezing temps
- UV resistance
- Durable and tear resistant

Product No.	Type	Roll Size	Sq Ft
3-02IBVP	Vapor Permeable	4'11" x 102'	501
3-02IBXP	Impermeable	5' x 100'	500

Packaging:	Weight (lbs)	Pallet	Coverage w/3" Lap
3-02IBVP	46 per Roll	25	474sf
3-02IBXP	54 per Roll	60	473sf

PLATES & FASTENERS

2" Barbed Seam Plates



Designed for membrane attachment over wood, plywood, and OSB decks. The plate is placed at designated locations within the membrane seam area and used in conjunction with IB HD #14 or IB XHD #15 Roofing Fasteners.

- OD: 2"
- ID: .265"/.270"
- Thickness: .032", 22 gauge
- Finish: AZ 55 Galvalume

Product No	Type	Bucket Qty	Weight (lbs)
6-0900	2" Seam Plate	1000	41 per box

2" Gyptec Insulation Plates



Designed for membrane attachment over gypsum and cementitious wood fiber decks. The plate is placed at designated locations within the membrane seam area and used only in conjunction with IB polymer gyptec fasteners.

- OD: 2"
- ID: .740"
- Thickness: .032", 22 gauge
- Finish: AZ55 Galvalume

Product No	Type	Bucket Qty	Weight (lbs)
6-2GYPTec	2" Insulation Plate	1000	30 per box

*Special Order

3" Gyptec Insulation Plates



Designed to secure cover boards and insulation in conjunction with applicable approved IB Polymer gyptec Fasteners over gypsum and cementitious wood fiber decks. The plate is placed at a specified rate and designated locations over the top insulation or cover board.

- OD: 3"
- ID: .740"
- Thickness: .019", 26 gauge
- Finish: AZ50 Galvalume

Product No	Type	Bucket Qty	Weight (lbs)
6-3GYPTec	3" Insulation Plate	1000	45 per box

*Special Order

RhinoBond Plates



Made of 22 gauge, G90 Steel with a proprietary PVC adhesive coating. The Rhinobond induction welding tools utilizes innovative induction welding technology to simultaneously weld the adhesive coated plates to IB membrane.

Plates are 3-in. (80 mm) round, .260" ID, .032" Thick, specially coated Galvalume, for steel, wood or structural concrete roof decks.

Product No	Type	Bucket Qty	Weight (lbs)
6-RBP08A-PVC	3" Insulation Plate	500	36 per box

*Special Order

AccuTrac Plates



Plates are made of Galvalume coated steel, polypropylene and nylon. 3-in. square AccuTrac plates and the proper IB fastener. AccuTrac is an ergonomically correct option that minimizes operator fatigue by eliminating contractor bending and twisting.

Product No	Type	Bucket Qty	Weight (lbs)
6-0911	3" Plate	1000	40 per box

*Special Order

2-3/8" Barbed Seam Plates



Designed for membrane attachment over concrete, steel, wood, plywood, and OSB decks. The plate is placed at designated locations within the membrane seam area and used in conjunction with IB HD #14, IB XHD #15 Roofing Fasteners, IB Dekspike Concrete Anchors, and IB CD-10 Concrete Fasteners.

- OD: 2-3/8"
- ID: .260"/.262"
- Thickness: .038", 20 gauge
- Finish: AZ 50 Galvalume

Product No	Type	Bucket Qty	Weight (lbs)
6-0905	2 3/8" Seam Plate	1000	36 per box

3" Insulation Plates



Designed to secure cover boards and insulation in conjunction with applicable approved IB Insulation/ Roofing Fasteners over concrete, steel, metal roof panels, wood, plywood, and OSB decks. The plate is placed at a specified rate and designated locations over the top insulation or cover board.

- OD: 3"
- ID: .260"
- Thickness: .019", 26 gauge
- Finish: AZ 50 Galvalume

Product No	Type	Bucket Qty	Weight (lbs)
6-0910	3" Insulation Plate	1000	41 per box

IB ISOweld PVC Plates



Made of 22 gauge, G90 Steel with a proprietary PVC adhesive coating. Utilizing innovative induction welding technology, the isoweld® induction welding tools to simultaneously weld the adhesive coated plates to IB membrane.

3.15" OD, .260" ID, G90 Steel with PVC adhesive coated one side, Purple Tint Color. FM Approved. Polyester gray backing.

Product No	Type	Bucket Qty	Weight (lbs)
6-ISOWELD	3" Plate	500	34 per box

*6 month shelf life

AccuSeam Plates



Plates are made of Galvalume coated steel, polypropylene and nylon. 2-inch plates should be used for lap seam joints.

Product No	Type	Bucket Qty	Weight (lbs)
6-0920	2" Plate	1000	30 per box

*Special Order

TPA Sleeve



Large domed plate provides secure resistance to wind uplift. Polyamide PA6 material protects against heat loss or gain. Ergonomic tube design for better insertion. Sharp point grooved tip makes insertion easy and provides secure clamping.

*for fastening insulation only

Product No	Type	Package
6-TPA2.75	2.75" Sleeve w/3" insulation plate	1000
6-TPA6.25	6.25" Sleeve w/3" insulation plate	500

PLATES & FASTENERS

IB SD #12 Insulation Fastener



Designed to secure insulation and separation materials to various substrates. Intended to be used with IB 3" insulation plates.

*SD HD and XHD = Average 40 SQ/1000 pcs at 12" O.C.

Product No	Type	Bucket Qty	Weight (lbs)
6-0720	1 3/8" Fastener	1000	13
6-0730	2 1/4" Fastener	1000	17
6-0703	3" Fastener	1000	20
6-0704	4" Fastener	1000	30
6-0780	5" Fastener	1000	34
6-0790	6" Fastener	1000	41
6-0800	7" Fastener	1000	48
6-0810	8" Fastener	1000	56

Features:

- Drill point design prevents fastener walking
- 13 threads per inch provides higher pull-out values
- Drill point cuts through gravel and BUR
- E-coat meets FM Approval Standard 4470

IB HD #14 Roofing Fastener



Designed to secure insulation and membrane to various substrates. It is used in conjunction with an IB 3" insulation plate and 2" and 2-3/8" barbed seam plates.

*SD HD and XHD = Average 40 SQ/1000 pcs at 12" O.C.

Product No	Type	Bucket Qty	Weight (lbs)
6-HD001.25	1 1/4" Fastener	1000	12
6-HD002	2" Fastener	1000	19
6-HD003	3" Fastener	1000	24
6-HD004	4" Fastener	1000	30
6-HD005	5" Fastener	500	22
6-HD006	6" Fastener	500	23
6-HD007	7" Fastener	500	28
6-HD008	8" Fastener	500	31
6-HD009	9" Fastener	500	38
6-HD010	10" Fastener	500	41
6-HD012	12" Fastener	500	25

Features:

- 10 threads per inch for ease of installation in concrete roof decks
- Low profile truss head
- Deep #3 recess provides for ultimate bit engagement
- The Dekfast reduced drill point provides for ultimate pull-out values by producing a minimum opening
- E-coat meets FM Approval Standard 4470

IB XHD #15 Roofing Fastener



Designed to secure insulation and membrane to various substrates. It is used in conjunction with an IB 3" insulation plate and 2" and 2-3/8" barbed seam plates.

*SD HD and XHD = Average 40 SQ/1000 pcs at 12" O.C.

Product No	Type	Bucket Qty	Weight (lbs)
6-XHD002	2" Fastener	1000	20
6-XHD003	3" Fastener	1000	29
6-XHD004	4" Fastener	1000	38
6-XHD005	5" Fastener	500	24
6-XHD006	6" Fastener	500	28
6-XHD007	7" Fastener	500	33
6-XHD008	8" Fastener	500	39
6-XHD009	9" Fastener	500	44
6-XHD010	10" Fastener	500	49
6-XHD012	12" Fastener	250	32
6-XHD014	14" Fastener	250	35
6-XHD016	16" Fastener	250	38

Features:

- Drill point design prevents fastener walking
- 13 threads per inch provides higher pull-out values
- Drill point cuts through gravel and BUR
- Above average pull out values in 24 & 26 gauge metal
- E-coat meets FM Approval Standard 4470

#12 Purlin Fastener



Designed to secure membrane to structural steel purlins in a metal roof retrofit application. It is used in conjunction with the IB 3" isoweld® plate and 2-3/8" barbed seam plates.

*SD HD and XHD = Average 40 SQ/1000 pcs at 12" O.C.

Product No	Type	Bucket Qty	Weight (lbs)
6-PUR334	3 3/4" Fastener	1000	33
6-PUR434	4 3/4" Fastener	1000	41
6-PUR534	5 3/4" Fastener	1000	48
6-PUR634	6 3/4" Fastener	500	28

Features:

- Shank diameter is smaller than that of the drill point and the outside thread diameter
- 24 threads per inch provides greater pull-out values
- Steel thickness: 18 ga (.045" nominal) through 1/4" (.250")
- E-coat
- 3.375" thread length (measured from tip of drill point to end of threads)

PLATES & FASTENERS

CD-10 Roofing Fastener



A mushroom head, hammer-in, non-threaded fastener designed to secure insulation and membrane to structural concrete roof substrates. It is used in conjunction with IB Insulation plates, isoweld® plates, IB Barbed Seam plates and IB Batten bars.

Product No	Type	Box Qty	Weight (lbs)
6-CD002	2" Fastener	500	13
6-CD003	3" Fastener	500	18
6-CD004	4" Fastener	500	23
6-CD005	5" Fastener	500	28
6-CD006	6" Fastener	500	33
6-CD007	7" Fastener	500	38
6-CD008	8" Fastener	500	44
6-CD009	9" Fastener	250	25
6-CD0010	10" Fastener	250	28
6-CD0011	11" Fastener	250	31
6-CD0012	12" Fastener	250	33

*Special Order for all sizes

Gyptec Roofing Fastener



Glass-filled nylon auger fastener with a 1" head designed to secure approved IB insulation and membranes to gypsum, lightweight insulating concrete and cementitious wood fiber.

Product No	Type	Box Qty	Weight (lbs)
6-GYPTEC030	3" auger	500	16
6-GYPTEC035	3.5" auger	500	16
6-GYPTEC040	4" auger	500	17
6-GYPTEC045	4.5" auger	500	21
6-GYPTEC050	5" auger	500	23
6-GYPTEC055	5.5" auger	500	27
6-GYPTEC060	6" auger	500	29
6-GYPTEC065	6.5" auger	500	31

*Special Order for all sizes

* Gyptec Plates available in 2" and 3" 6-GYPTEC and 6-3GYPTEC

Zinc Nail-ins



A mushroom head, expanding zinc plated steel nail-in anchor used for fastening IB termination bars and metal flashings to concrete and filled masonry walls.

Product No	Type	Box Qty	Weight (lbs)
6-ZNI14112	1/4" x 1-1/2" Nail-in	100	3 per box

ZAC Anchors



The ZAC Anchor Fastener is designed to secure termination bar, counterflashing and various metal flashings to wood, masonry / concrete and steel.

Product No	Type	Box Qty	Weight (lbs)
6-ZAC	1-3/8" ZAC Anchors	1000	25 per box

Banding Clamps



IB roller ball stainless clamp has a tensile load of 300 pounds.

Small: (Fits A & B Cones)

- 1'-8" L x 1/4" W | 1/2" Min 5" Max

Large: (Fits C, D, & E Cones)

- 4'-3" L x 1/2" W | 2 1/2" Min 16" Max

*Band-It Tension Tool Required

Product No	Type	Bag Qty
4-SSC1	*Small Stainless Steel Clamp	100
4-SSC2	Large Clamps	10

Band-It Tension Tool



The Band-It XE9229 tensions and cuts off up to 12mm wide regardless of material or coating.

Weight: 1.25 lbs

*Used for Banding Clamps

Product No	Type
8-BTT	Band-It Tension / Cutter

Band-It Strap



201 Stainless Steel BAND-IT Band, bright annealed finish sets the standard in banding, clamping and fastening with a combination of high strength and quality appearance.

Width: 3/8 in.

Average breaking strength: 1875 lbs

Box - 3/8 in. x 100 ft.

Weight: 7.00 lbs

Product No	Type
4-SBKIT	Band-It Band

- 201 stainless steel offers good resistance to oxidation and many moderate corrosive agents
- Utilized in general use banding applications
- Can be used with clip style buckles to create band clamps
- Packaged in a standard box

Band-It Scru-Seal Adjustable Clamps



A stainless steel rack and pinion system used with 100ft banding reels to create any size clamp.

An adjustable worm drive/screwdriver clamp can be made with any band cutter and a screw driver. Can be re-tensioned at any time.

Product No.	Type
4-BC	Scru-Seal Adjustable Clamping system

ADHESIVES

IB Water Borne Adhesive 636




A polymeric water borne adhesive designed specifically for horizontal bonding applications of all IB Membranes to wood, concrete, and glass-faced polyisocyanurate insulations and many other re-cover boards and decking materials.

Coverage:
Between 500 - 900 square feet / 5 gallon

Product No	Type	Color	Weight	Pallet
7-WB636	Water Borne	White	46	45

Colors:

White



IB Vertibond Adhesive



A solvent bearing, synthetic polymer-based adhesive designed specifically for horizontal and vertical bonding applications of all IB membranes to metal, wood, concrete, organic and glass-faced polyisocyanurate insulations, and many other recover boards and decking materials.


Coverage:
60 square feet / gallon
300 square feet / 5 gallon

Product No	Type	Color	Pallet
7-CA5	Vertibond	Amber	45

*Limited stock

Colors:

Amber



IB Water Borne Adhesive




Water-based adhesive designed specifically for horizontal bonding applications of all IB Membranes to wood, concrete, and glass-faced polyisocyanurate insulations and many other re-cover boards and decking materials. IB Water Borne Adhesive is extremely user friendly and ideal for fully adhered roofing applications.

Coverage:
Between 300 - 525 square feet / 3 gallon pail

Product No	Type	Color	Weight	Pallet
7-WB35	Water Borne	White	30	60

Colors:

White



IB Vertibond Adhesive 432



A solvent bearing, synthetic polymer-based adhesive designed specifically for horizontal and vertical bonding applications of all IB membranes to metal, wood, concrete, organic and glass-faced polyisocyanurate insulations, and many other recover boards and decking materials.

Coverage:
300 square feet / 5 gallon

Product No	Type	Color	Pallet
7-CA432	Vertibond	Amber	45

Colors:

Amber



IB Water Stop




Butyl-based, one-component mastic designed specifically for sealing roofing membrane to substrates, behind exposed termination bars, and between roofing membrane and drain flashings to create a flexible seal for stopping water intrusion into the roofing system.

Coverage:
15 linear feet / 10.3 oz tube / 10 tubes per box

Product No	Type	Color
7-WS	Water Stop	Gray

Colors:

Gray



1-Part Pourable Penetration Sealant



Moisture curing, pourable sealant designed for use in pitch pans. It is solvent-free, contains no isocyanates and will not shrink upon curing.


Product No	Type	Color
7-R520W2L	Penetration Sealant	Amber

Features:

- Solvent free, 100% solids will not shrink
- 20 minute skin cure
- Self leveling
- Can be applied at temperatures as low as 30° F

Colors:

Amber



ADHESIVES

Millennium Universal Primer



All-purpose water-based primer designed for use with IB Rapid Set Insulation Adhesive, PG-1 insulation and membrane adhesives. A red tint offers you easy recognition of areas of applied primer.

Coverage:
525-875 sq ft / gallon / 3.5 gallon pail


Product No	Type	Color
7-UP	Universal Primer	Red

*Special Order

- Features:**
- Easy to apply one-part formulation
 - Water based, VOC free
 - Quick application, applies in one coat

Colors:

Red



IB Rapid Set Adhesive



A solvent free, low viscosity, two component, essentially VOC free, all purpose, low rise, polyurethane foam adhesive designed to adhere IB approved insulation, cover board and thermal barrier boards to a variety of roof substrates in both new and re-roof applications.

Coverage:
400-600 sq ft / case

Product No	Type	Color	Weight
OS-FA15-04	Insulation Adhesive	White	18 lbs

- Features:**
- Non-penetrating attachment system
 - Low VOC
 - Reduces construction noise
 - Rapid application

Colors:

White



IBARRIER Primer

***for IBARRIER SA Membrane Only*



Primer is a fast-drying primer consisting of a proprietary blend of SBS polymer, resins and volatile solvents designed to enhance IBARRIER Vapor Retarder adhesion to a variety of approved substrates.


Coverage:
500-650 sq ft / 5 gal / 44 lbs per case

Product No	Type	Color
7-IBPrime	IBARRIER	Copper

*Special Order

Colors:

Copper



Millennium PG-1



A solvent free, low viscosity, two component, essentially VOC free, all purpose, low rise, polyurethane foam adhesive designed to adhere IB approved insulation, cover board and thermal barrier boards and IB Fleeceback PVC to a variety of roof substrates in both new and re-roof applications

Coverage:
5 gallon (18.9L) Kit: 2,000 - 2,500 sq ft (186m² - 232m²) / Weight 83 lbs


Product No	Type	Color
PG-1	Insulation Adhesive	Amber

*Special Order

- Equipment:**
- Millennium Cyclone and Cyclone II Pump machines
 - Graco E-10 Reactor
 - Graco Predator
 - Adhesives Systems Technology GMP-075
 - Adhesives Systems Technology PCH GMP-500

Colors:

Amber



Olybond 500 SpotShot Adhesive



Fast-acting, two-component, low-rise polyurethane foam adhesive designed to adhere a variety of board stocks to a variety of roof substrates in both new and re-roof applications.
SOLD BY THE CASE ONLY
Coverage:
400-600 sq ft / 4 Dual Cartridges / 18 lbs per case


Product No	Type	Color
7-OB500SS-R	Spot Shot	White

*Special Order

- Features:**
- Non-penetrating attachment system
 - Odor free
 - Low VOC
 - Rapid application

Colors:

White



IB Prime LVOC

***for IBARRIER SA Membrane Only*



A zero VOC, quick-drying primer comprised from a blend of SBS synthetic polymers, resins, and solvents designed to enhance the adhesion of IBARRIER SA Membrane to a variety of approved substrates.


Coverage:
515-2060 sq ft / 5 gal / 42 lbs per case

Product No	Type	Color
IBPrime-LV	IBARRIER	Red

*Special Order

Colors:

Red



ADHESIVES

Millennium PG-1 EF ECO Adhesive



A two component, low rise, solvent-free, polyurethane foam adhesive that contains no HFC-134a or other high Global Warming Potential (GWP) propellants. Millennium PG-1 EF ECO is packaged in dual pressurized canisters and dispensed utilizing a disposable adhesive applicator assembly and twenty five-foot hoses.

*Hose & Gun included

Product No	Type	Color	Weight
7-PG1EFECO	Millennium PG-1 EF ECO tanks	Off White	91lbs

- Features:**
- No CFC or HCFC
 - Tip allows for multiple applications through single static mixer
 - VOC content <50 g/L
 - No extra equipment required
 - Solvent free
 - Eliminates thermal bridging

Coverage Ribbon: up to 35 sq per set or Spatter up to 24 squares per set



Requires ground shipping/additional shipping

Colors: Off White

Millennium PVC Spray Contact Adhesive



Millennium sprayable Single-Ply bonding adhesive is a fast drying, sprayable bonding adhesive for adhering Fleeceback and standard PVC membranes to horizontal and vertical roof surfaces. The adhesives formula offers excellent adhesion and quick drying over a wide range of temperatures. Millennium Sprayable Single-Ply Bonding Adhesive is approved for use in all environmentally regulated regions per current requirements. Coverage: 1000 sq ft per canister coverage rate

Product No	Type	Weight
7-PVCSPRAY-HB	Millennium PG-1	38 lbs

*Qty: 36 per Skid

Components (*Sold Separately)

Product No	Type	Weight
7-SPRAYER	Spray Applicator	1.1 lbs
7-SPRAYEREXT	Applicator Extension	1.5 lbs
7-SPRAYFLUSH	Flush Solution	13.5 lbs
7-SPRAYHOSE12	Steel Hose, 12'	2 lbs



Requires ground shipping/additional shipping

Olybond 500 Tanks/Cannisters LR Foam Adhesive



Olybond 500 Tanks are a fast-acting two-component, low-rise polyurethane foam adhesive designed to adhere a variety of board stocks to a variety of roof substrates in both new and re-roof applications.

Coverage: 2500-3000 lbs / 32 sets per skid

Product No	Type	Color	Weight
7-OB500TANK	Insulation Adhesive	White	88 lbs

*Special Order

- Features:**
- Non-penetrating attachment system
 - Odor Free
 - Low VOC
 - Reduces construction noise



Requires ground shipping/additional shipping

Colors: White

DuraLink 35



DuraLink 35 is a multi-purpose, resilient joint sealant that combines economy and high performance.

Package: 24 per box

Product No.	Type	Color
7-0CBLK	Duralink 35	Black
7-0CW	Duralink 35	White
7-0CG	Duralink 35	Gray
7-0CL	Duralink 35	Clear
7-0CT	Duralink 35	Tan
7-0CS	Duralink 35	Cool Sand

Features:

- High Joint-Movement Capability
- Strong, Durable Adhesion
- Moisture-Cure Formula
- Low VOC and Solvent-Free
- Paintable and Color-Stable
- Easy Application and Cleanup



Requires ground shipping/additional shipping

Colors:

Black	White	Tan	Gray	Cool Sand	Clear
---	--	--	---	--	--

M-1 Sealant



M-1 is a moisture curing, polyether adhesive sealant designed for applications in damp, dry, or cold climates. M-1 is solvent free and contains no isocyanates.

package: 24 per box

Product No	Type	Color
7-M1	M-1 Sealant	Black

Features:

- Easy to apply, no mixing
- Non-penetrating attachment system
- Rapid Application
- Saves Labor

Colors:

Black



Requires ground shipping/additional shipping

ADHESIVES

IB PMMA Liquid Flashing Resin



IB PMMA Liquid Flashing Resin is a high-quality flashing resin designed to be mixed with IB PMMA Catalyst Gel as a two-part PMMA fast curing flashing membrane. Designed to seal penetrations and low-profile roof transitions or where prefabricated PVC flashing components are not utilized.

Coverage:

- approx. 40sf @ 90mils (Smooth Surfaces)
- approx. 32sf @ 110mils (Rough Surfaces)

Item Code	Description / Color	Size	Weight
7-PMMALFRW	IB PMMA Liquid Flashing Resin-10kg White	2.6-gal	22 lbs
7-PMMALFRG	IB PMMA Liquid Flashing Resin-10kg Gray*	2.6-gal	22 lbs
7-PMMALFRT	IB PMMA Liquid Flashing Resin-10kg Tan*	2.6-gal	22 lbs


Features:

- Fast-Curing 2-Part System
- Wide Temperature Range
- Versatile Application
- Reinforced with IB PMMA Fleece
- Multiple Color Options

Benefits:

- Rapid Installation & Cure Times
- Long-Term Protection
- Enhanced Durability & Coverage
- Simple Storage & Handling
- Easy Cleanup & Disposal

Colors:



*Each pail has a re-sealable locking ring lid.

IB PMMA Catalyst Gel



IB PMMA Catalyst Gel is a smooth, non-separating reactive agent gel (dibenzoyl peroxide) used to initiate curing when mixed with IB PMMA Liquid Flashing Resins. IB PMMA Catalyst Gel is less hazardous and is easier to use than dry forms of dibenzoyl peroxide catalyst.

Packaging: 1 Case/Box of 30 Pouches

Item Code	Description / Color	Size
7-PMMACAT	IB PMMA Catalyst Gel	2.3oz

Features:

- Smooth, Non-Separating Formula
- Less Hazardous Than Powder Catalysts
- Pre-Measured, Vented Packaging
- Fast, Reliable Curing
- Extended Shelf Life

IB PMMA Universal Primer Blue



IB PMMA Universal Primer is a high performance PMMA resin designed to be mixed with IB PMMA Catalyst Gel as a fast-curing two-part PMMA universal primer.

Coverage:

- approx. 350sf @ 10mils

Item Code	Description / Color	Size	Weight
7-PMMAPRIME	IB PMMA Universal Primer BLUE-10kg	2.6-gal	22 lbs

Features:

- Fast-Curing Two-Part Formula
- Universal Primer for Various Substrates
- Wide Application Temperature Range
- Versatile Substrate Compatibility
- Easy Packaging and Storage

Colors:



*Each pail has a re-sealable locking ring lid.

IB PMMA Horizontal Resin



IB PMMA Liquid Horizontal Resin is a high-quality waterproofing resin designed to be mixed with IB PMMA Catalyst Gel as a two part fast curing PMMA horizontal waterproofing membrane. It is designed to coat horizontal surfaces in conjunction with IB PMMA Liquid Flashing.

Coverage:


- approx. 40sf @ 90mils (Smooth Surfaces)
- approx. 32sf @ 110mils (Rough Surfaces)

Item Code	Description / Color	Size	Weight
7-PMMALHR	IB PMMA Liquid Horizontal Resin-10kg	2.6-gal	22 lbs
7-PMMALHR20	IB PMMA Liquid Horizontal Resin-20kg	5.3-gal	44 lbs

Features:

- Fast-Curing Formula
- Two-Part PMMA System
- Reinforced Application
- Wide Temperature Range
- Versatile Substrate Compatibility
- Easy Packaging and Storage

Colors:



*Each pail has a re-sealable locking ring lid.

IB PMMA Fleece



IB PMMA Fleece is a high quality, non-woven needle-punched polyester reinforcing fabric used in conjunction with IB PMMA Liquid Flashing or IB PMMA Liquid Horizontal resins.

Item Code	Description / Color	Roll Size	Weight
7-PMMAFABR	IB PMMA Fleece	12" x 300'	110 lbs
7-PMMAFABR40	IB PMMA Fleece	40" x 300'	214 lbs

Features:

- High-Quality, Non-Woven Polyester Construction
- Low Water Absorption (< 1%)
- Optimal Thickness (40 mils)

Colors:



FLASHINGS & VENTS

Non-Reinforced Detail Flashing Roll



Fabricated from a non-reinforced IB PVC Single-Ply Membrane. It is utilized for detail work which requires a flexible, easy to install membrane.

Product No	Type	Color	Weight (lbs)
1-60WGNRF	60 Mil Roll	White	9.14
1-60BNZNR	60 Mil Roll	Bronze	9.14
1-60GNRF	60 Mil Roll	Gray	9.14
1-60TNRF	60 Mil Roll	Tan	9.14
1-60SNRF	60 Mil Roll	Cool Sand	9.14
1-60STONRF	60 Mil Roll	Cool Stone	9.14

Packaging:


Size	Thickness	Weight (lbs)	Pallet
1' x 22'	60 Mil	10	112

Use:

IB N.R. Detail Flashing Rolls are used in a variety of IB Construction Details and in difficult to flash areas such as at canted corners, field wrapped penetrations and detailing joints in IB PVC Clad metal flashings.



Flexible Metal Profile



IB Flexible Metal Profiles are specially designed to provide the aesthetic appeal of a standing seam metal roof.

Packaging:
35 per box
Weight:
2.0 LB per Profile (70lbs / box)

Product No	Type	Color
4-FMPG	Profile	Gray
4-FMPT	Profile	Tan
4-FMPR	Profile	Red
4-FMPGRN	Profile	Green
4-FMPBNZ	Profile	Bronze
4-FMPS	Profile	Sand

*Texas Only Warehouse

Product Specs:


Flexible Metal Profiles are 10' feet in length, Profile height is 1-1/8". Rib profile is 1/4" wide at top and 5/8" wide at base. Base flange width is 1-3/8"

Use:

IB Flexible Metal Profiles are sold as accessory products used in conjunction with select IB PVC membranes.



Foil Tape



High-quality, high tensile strength aluminum foil coated in epoxy resin with strong, cold-weather solvent acrylic adhesive set on a easy-release silicone paper liner to preserve the adhesive and provide ease of use.

Product No	Type
2-FT2	2" Foil Tape

Packaging:

Size	Weight (lbs)	Pack
2" x 150'	1.5 per roll	individual rolls or 24 per box

IB Cover Strip



Made from IB PVC Single Ply, comprised of a polyester scrim reinforced, compounded PVC resinbased sheet with plasticizers, stabilizers, fillers, pigments, and other proprietary materials meeting ASTM D4434, Type III.

Packaging:

Size	Thickness
6" x 90'	50 Mil
6" x 90'	60 Mil
6" x 90'	80 Mil
12" x 90'	50 Mil
12" x 90'	60 Mil
12" x 90'	80 Mil

Product No	Type	Color	Weight (lbs)
1-60CSW	60 Mil 6" x 90 Strip	White	18.1
1-60CSG	60 Mil 6" x 90 Strip	Gray	18.1
1-60CST	60 Mil 6" x 90 Strip	Tan	18.1
1-60CSS	60 Mil 6" x 90 Strip	Cool Sand	18.1
1-60CSSTO	60 Mil 6" x 90 Strip	Cool Stone	18.1
1-60CSBNZ	60 Mil 6" x 90 Strip	Bronze	18.1
1-60CSTC	60 Mil 6" x 90 Strip	Terra Cotta	18.1
1-80CSW	80 Mil 6" x 60 Strip	White	14.9
1-80CSG	80 Mil 6" x 60 Strip	Gray	14.9
1-80CSGWH	80 Mil 6" x 60 Strip	Chemguard White	14.9
*1-5012CSCGW	50 Mil 12"x90' Strip	CG White	35
*1-5012CSG	50 Mil 12"x90' Strip	Gray	35
*1-5012CST	50 Mil 12"x90' Strip	Tan	35
*1-5012CSW	50 Mil 12"x90' Strip	White	35
*1-8012CSG	80 Mil 12"x60' Strip	Gray	29.8
*1-8012CST	80 Mil 12"x60' Strip	Tan	29.8

* Made to Order

Use:

- Flashing roll for stripping-in IB PVC Clad Metal Drip Edge, Gravel Stop and clad metal flashings
- Flashing roll used as a cover strip over mechanically fastened batten-bars; over intermediate termination bars or fastener rows on walls, and over supplemental exposed fastening rows at Perimeter and Corner roof zones
- Flashing roll for detailing IB PVC Single Ply Fleece back end laps

Colors:



IB Non-Reinforced 5" X 8" Metal Joint Patch



Pre-cut, non-reinforced IB PVC membrane patches designed to be used in conjunction with a single-sided, bond breaker foil tape at butt joints of IB PVC Clad Metal Drip Edge and Gravel Stop.

Product No	Type	Color
1-NRBJ	NR Metal Patch	White
1-NRBJG	NR Metal Patch	Gray
1-NRBJT	NR Metal Patch	Tan
1-NRBJ45BNZ	NR Metal Patch	Bronze

Packaging:


Size	Thickness	Weight (lbs)	Bag
5" x 8"	60 Mil	5 per pack	50 per bag
		*45 Mil Bronze Only	

Colors:



FLASHINGS & VENTS

Short A Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-ASW-R	Short A Cone	White	0.32
4-ASG-R	Short A Cone	Gray	0.32
4-AST-R	Short A Cone	Tan	0.32
4-ASCS-R	Short A Cone	Cool Sand	0.32
4-ASSTO-R	Short A Cone	Cool Stone	0.32
4-ASCGW-R	Short A Cone	ChemGuard	0.32
4-ASBNZ-R	Short A Cone	Bronze	0.32
4-ASTC-R	Short A Cone	Terra Cotta	0.32

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
Short A Cone	14"	3 ¼"	1/4"	5 ½"	1/4" - 1"	25

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



Split Short A Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-SAWS-R	Split Short A Cone	White	0.32
4-SAGS-R	Split Short A Cone	Gray	0.32
4-SATS-R	Split Short A Cone	Tan	0.32
4-SASS-R	Split Short A Cone	Cool Sand	0.32
4-SASTOS-R	Split Short A Cone	Cool Stone	0.32
4-SACGWS-R	Split Short A Cone	ChemGuard	0.32
4-SABNZS-R	Split Short A Cone	Bronze	0.32
4-SATCS-R	Split Short A Cone	Terra Cotta	0.32

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
Split Short A Cone	14"	3 ¼"	1/4"	5 ½"	1/4" - 1"	25

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



A Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-AW-R	A Cone	White	0.44
4-AG-R	A Cone	Gray	0.44
4-AT-R	A Cone	Tan	0.44
4-AS-R	A Cone	Cool Sand	0.44
4-ASTO-R	A Cone	Cool Stone	0.44
4-ACGW-R	A Cone	ChemGuard	0.44
4-ABNZ-R	A Cone	Bronze	0.44
4-ATC-R	A Cone	Terra Cotta	0.44

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
A Cone	15"	4 ½"	1"	8 ½"	1" - 2 ¾"	25

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



B Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-BW-R	B Cone	White	0.53
4-BG-R	B Cone	Gray	0.53
4-BT-R	B Cone	Tan	0.53
4-BS-R	B Cone	Cool Sand	0.53
4-BSTO-R	B Cone	Cool Stone	0.53
4-BCGW-R	B Cone	ChemGuard	0.53
4-BBNZ-R	B Cone	Bronze	0.53
4-BTC-R	B Cone	Terra Cotta	0.53

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
B Cone	15 ½"	5 ¼"	2 ½"	10 ½"	2 ¾" - 4"	25

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



FLASHINGS & VENTS

C Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-CW-R	C Cone	White	1.02
4-CG-R	C Cone	Gray	1.02
4-CT-R	C Cone	Tan	1.02
4-CS-R	C Cone	Cool Sand	1.02
4-CSTO-R	C Cone	Cool Stone	1.02
4-CCGW-R	C Cone	ChemGuard	1.02
4-CBNZ-R	C Cone	Bronze	1.02
4-CTC-R	C Cone	Terra Cotta	1.02

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
C Cone	17 1/2"	8"	4"	10 1/2"	4" - 7 1/2"	25

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



D Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-DW-R	D Cone	White	1.64
4-DG-R	D Cone	Gray	1.64
4-DT-R	D Cone	Tan	1.64
4-DS-R	D Cone	Cool Sand	1.64
4-DSTO-R	D Cone	Cool Stone	1.64
4-DCGW-R	D Cone	ChemGuard	1.64
4-DBNZ-R	D Cone	Bronze	1.64
4-DTC-R	D Cone	Terra Cotta	1.64

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
D Cone	23"	12"	7 1/2"	9"	7 1/2" - 9 1/2"	20

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



E Cone



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-EW-R	E Cone	White	2.6
4-EG-R	E Cone	Gray	2.6
4-ET-R	E Cone	Tan	2.6
4-ES-R	E Cone	Cool Sand	2.6
4-ESTO-R	E Cone	Cool Stone	2.6
4-ECGW-R	E Cone	ChemGuard	2.6
4-EBNZ-R	E Cone	Bronze	2.6
4-ETC-R	E Cone	Terra Cotta	2.6

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Pipe Size	Box Qty
E Cone	28"	18"	9 1/2"	12"	9 1/2" - 11 1/2"	10

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



0 to 5 Cone - 4"



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight
4-4025W-R	4" Cone	White	1.064
4-4025G-R	4" Cone	Gray	1.064
4-4025T-R	4" Cone	Tan	1.064
4-4025S-R	4" Cone	Cool Sand	1.064
4-4025STO-R	4" Cone	Cool Stone	1.064
4-4025CGW-R	4" Cone	ChemGuard	1.064
4-4025BNZ-R	4" Cone	Bronze	1.064
4-4025TC-R	4" Cone	Terra Cotta	1.064

Pipe Flashing Specifications

Product	Base	Height	Qty
4" Round Cone	21"	5"	25

Colors:



FLASHINGS & VENTS

0 to 5 Cone - 6"



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-6025W-R	6" Cone	White	1.079
4-6025G-R	6" Cone	Gray	1.079
4-6025T-R	6" Cone	Tan	1.079
4-6025S-R	6" Cone	Cool Sand	1.079
4-6025STO-R	6" Cone	Cool Stone	1.079
4-6025CGW-R	6" Cone	ChemGuard	1.079
4-6025BNZ-R	6" Cone	Bronze	1.079
4-6025TC-R	6" Cone	Terra Cotta	1.079

Pipe Flashing Specifications

Product	Base	Height	Qty
6" Round Cone	24"	5"	25

Colors:



0 to 5 Cone - 8"



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-8025W-R	8" Cone	White	1.66
4-8025G-R	8" Cone	Gray	1.66
4-8025T-R	8" Cone	Tan	1.66
4-8025S-R	8" Cone	Cool Sand	1.66
4-8025STO-R	8" Cone	Cool Stone	1.66
4-8025CGW-R	8" Cone	ChemGuard	1.66
4-8025BNZ-R	8" Cone	Bronze	1.66
4-8025TC-R	8" Cone	Terra Cotta	1.66

Pipe Flashing Specifications

Product	Base	Height	Qty
8" Round Cone	26"	6 1/2"	25

Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



Oval 0 to 5 Cone - 4"



IB factory fabricated, dielectrically welded reinforced IB PVC Single-Ply base and a non-reinforced IB PVC Single-Ply upper. Designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors.

Product No	Type	Color	Weight (lbs)
4-4OV025W-R	4" Oval Cone	White	1.079
4-4OV025G-R	4" Oval Cone	Gray	1.079
4-4OV025T-R	4" Oval Cone	Tan	1.079
4-4OV025S-R	4" Oval Cone	Cool Sand	1.079
4-4OV025STO-R	4" Oval Cone	Cool Stone	1.079
4-4OV025CGW-R	4" Oval Cone	ChemGuard	1.079
4-4OV025BNZ-R	4" Oval Cone	Bronze	1.079
4-4OV025TC-R	4" Oval Cone	Terra Cotta	1.079

Pipe Flashing Specifications

Product	Base Flashing	Base	Top	Height	Box Qty
4" Oval Cone	22"	6" x 10"	3" x 6"	5"	25


Use:

IB Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines and other circular profile penetrations and flashings.

Colors:



Universal Outside Corner



Fabricated from 60 mil, non-reinforced IB PVC Single-Ply for easy installation to reduce roof top labor and call backs by reducing workmanship errors. Designed for use on canted or irregular outside corner details.

Product No	Type	Color	Weight (lbs)
4-MUCW	Universal Corner	White	0.15

Specifications

Type of Corner	Height	Width	Qty
Universal Corner	7"	7"	25

Colors:



FLASHINGS & VENTS

Round T-Joint Patch



Generally used to patch T-joints (mandatory on 80 mil projects).

Product No	Type	Color	Weight (lbs)
4-RP50W	T-Joint Patch	White	2.09
4-RP50G	T-Joint Patch	Gray	2.09
4-RP50T	T-Joint Patch	Tan	2.09
4-RP50S	T-Joint Patch	Cool Sand	2.09
4-RP50STO	T-Joint Patch	Cool Stone	2.09
4-RP50CGW	T-Joint Patch	ChemGuard	2.09
4-RP50BNZ	T-Joint Patch	Bronze	2.09
4-RP50TC	T-Joint Patch	Terra Cotta	2.09


Packaging:

Size	Thickness	Weight (lbs)	Bag
5"	60 Mil	3.5	50

Colors:



Inside Corner



Fabricated from 60 mil, non-reinforced IB PVC Single-Ply for easy installation to reduce roof top labor and call backs by reducing workmanship errors. Designed for non-canted 90° inside corners.

Product No	Type	Color	Weight (lbs)
4-MICW	Molded Inside Corner	White	0.09
4-MICG	Molded Inside Corner	Gray	0.09
4-MICT	Molded Inside Corner	Tan	0.09
4-MICS	Molded Inside Corner	Cool Sand	0.09
4-MICBNZ	Molded Inside Corner	Bronze	0.09


Specifications

Type of Corner	Height	Width	Qty
Inside Corner	5"	5"	25 per box

Colors:



IB Pitch Pan



Fabricated from IB PVC Clad Metal constructed with durable 45 mil non-reinforced IB PVC film laminated to 24 gauge, G90 coated galvanized sheet metal.

Product No	Type	Color	Weight (lbs)
4-PP42	4" Pitch Pan	White	13.5
4-PP62	6" Pitch Pan	White	13.5
4-PP82	8" Pitch Pan	White	13.5

* 2" tall


Feature:

- Split pan format for ease of installation
- Factory welded reinforced membrane target
- Integral flanges for securement
- Custom orders available for a variety of membrane thicknesses and color options

Colors: *All other colors are custom



Outside Corner



Fabricated from 60 mil, non-reinforced IB PVC Single-Ply for easy installation to reduce roof top labor and call backs by reducing workmanship errors. Designed for non-canted 90° outside corner details.

Product No	Type	Color	Weight (lbs)
4-MOCW	Molded Outside Corner	White	0.53
4-MOCG	Molded Outside Corner	Gray	0.53
4-MOCT	Molded Outside Corner	Tan	0.53
4-MOCS	Molded Outside Corner	Cool Sand	0.53
4-MOCSTO	Molded Outside Corner	Cool Stone	0.53
4-MOCBNZ	Molded Outside Corner	Bronze	0.53
4-OCSTO	Outside Corner	Cool Stone	0.53

Specifications

Type of Corner	Height	Width	Qty
Outside Corner	5"	5"	50

Colors:



FLASHINGS & VENTS

U-Anchor 1400



The U1400-PVC is a lightweight rooftop attachment system consisting of a U-Anchor 1000 Series plate and cover membrane. The cover membrane is factory sealed to the top of the plate. For mechanically attached and fully adhered PVC single-ply membranes.
*Special Order Item

Product No.	Type	Color
6-UA1400	U-Anchor	White *Colors

(Specify Color When Ordering)

Product Specs

Standard Bolt - 3/8"-16 x 1 - 3/8"
*(Please note on order if you need a different size)
Material Type: 304 Stainless Steel

Packaging

Sold Individually / Box Quantity

Individual Weight: Approx. 1.1875 lbs

Plate

Outer Diameter: 4.75"
Fastener Hole Diameter: 0.236" (4 holes)
Fastener Hole Pattern: 2.49" Diameter
Material Thickness: 0.039"
Material Type: Galvalume® AZ55

Full Box Quantity: 10 units
Box Weight: Approx. 17 lbs

Membrane

Color: Default White*
Length: 9.75"
Width: 9.75"
Thickness: Default 60 mil*

Colors:



U-Anchor 2000



The U-Anchor 2000-PVC is a lightweight rooftop attachment system consisting of a thermoplastic target membrane and a U-Anchor 2000 series plate. For fully adhered PVC single-ply membranes.

Product No.	Type	Color
6-UA2000	U-Anchor	White *Colors

(Specify Color When Ordering)

Product Specs

Bolt - 3/8"-16 x 1.5" Bolt*
Material Type: 304 Stainless Steel

Packaging

Sold Individually / Box Quantity
Individual Weight: Approx. 1.1875 lbs
Full Box Quantity: 10 units
Box Weight: Approx. 17 lbs

Plate

Outer Diameter: 5-1/2"
Fastener Hole Diameter: 17/64" (8 holes)
Fastener Hole Pattern: 4-1/8" Diameter
Material Thickness: 0.047" (1.194mm)
Material Type: Galvalume® AZ55

Membrane

Color: Default White*
Length: 15.75"
Width: 15.75"
Thickness: Default 60 mil*

Colors:



U-Anchor 2400



The U2400-PVC is a lightweight rooftop attachment system consisting of a U-Anchor 2000 Series plate and cover membrane. The cover membrane is factory sealed to the top of the plate. For mechanically attached and fully adhered PVC single-ply membranes.

Product No.	Type	Color
6-UA2400W	U-Anchor	White*
6-UA2400G	U-Anchor	Gray
6-UA2400T	U-Anchor	Tan
6-UA2400S	U-Anchor	Cool Sand
6-UA2400STO	U-Anchor	Cool Stone
6-UA2400CGW	U-Anchor	Chemguard (White)
6-UA2400BNZ	U-Anchor	Bronze
6-UA2400TC	U-Anchor	Terra Cotta

Limited stock with 60mil bases in NV in White Only

Colors:



Product Specs

3/8"-16 x 1.5" Attachment Bolt*
Material Type: 304 Stainless Steel

Plate

Outer Diameter: 5-1/2"
Fastener Hole Diameter: 17/64" (8 holes)
Fastener Hole Pattern: 4-1/8" Diameter
Material Thickness: 0.047" (1.194mm)
Material Type: Galvalume® AZ55
Color: Default White*
Length: 11.75"
Width: 11.75"
Thickness: Default 60 mil*

Packaging

Sold Individually / Full Box Quantity
Individual Weight: Approx. 0.75 lbs
Full Box Quantity: 10 units
Box Weight: Approx. 10 lbs

FLASHINGS & VENTS

FLASHINGS & VENTS

U-Anchor 3400



The U3400-PVC is attached by fastening through the roofing assembly into the structural decking with 2-12 approved fasteners. The membrane cover is then hot air welded around the perimeter to the roof membrane. For mechanically attached and fully adhered PVC single-ply membranes.

Product No | **Type**
6-UA3400 | U-Anchor
 (Specify color when ordering)
 *Special Order

Colors:



Product Specs

Fastener
 3/8"-16 x 1.5" Attachment Bolt*
 Material Type: 304 Stainless Steel

Plate
 Dimensions: 11.08" x 5.47"
 Fastener Hole Diameter: 17/64" (12 holes)
 Material Thickness: 0.047" (1.194mm)
 Material Type: Galvalume® AZ55

Membrane
 Color: Default White*
 Length: 17.5"
 Width: 11.75"
 Thickness: Default 60 mil*

Packaging

Sold Individually OR Full Box
 Quantity
 Individual Weight: Approx. 1.4 lbs
 Full Box Quantity: 10 units
 Box Weight: Approx. 14 lbs

U-Anchor 4400



The U4400-PVC is a lightweight rooftop attachment system consisting of a U-Anchor 4000 Series plate and cover membrane. The cover membrane is factory sealed to the top of the plate. For mechanically attached PVC single-ply membranes.

Product No | **Type**
6-UA440038 | U-Anchor
 (Specify color when ordering)
 *Special Order

Colors:



Product Specs

Fastener
 3/8"-16 x 1.5" Attachment Bolt*
 Material Type: 304 Stainless Steel


Plate
 Outer Diameter: 14.267"
 Inner Fastener Hole Pattern: 9.185" (8 holes)
 Outer Fastener Hole Pattern: 13" (4 holes)
 Material Thickness: 0.118"
 Material Type: Galvalume® AZ55

Membrane
 Color: Default White*
 Length: 17.5"
 Width: 17.5"
 Thickness: Default 60 mil*

Packaging

Sold Individually OR Full Box
 Quantity
 Individual Weight: Approx. 4 lbs
 Full Box Quantity: 4 units
 Box Weight: Approx. 16 lbs



U-Anchor Fall Protection System



The Fall Arrest Anchor is suited for membrane and built-up roof systems. It is ideally suited for maintenance personnel working at heights utilizing a harness and a fixed length lanyard or rope. The anchor point incorporates a unique energy absorbing swivel eye attachment point, which provides 360° working radius.

Product No | **Type**
6-UAFP | U-Anchor
 (Specify color when ordering)
 *Special Order

U-Anchor Snow Fence Retention Systems



Snow Retention Systems are specifically designed for low-slope roofing materials, providing building owners and contractors with a reliably engineered and thoroughly tested solution. These systems ensure exceptional strength and peace of mind by effectively holding back and retaining snow on commercial roofing applications.

- *Available Options:
1. 2-Pipe Snow Fence
 2. Unitized Snow Fence

Product No. | **Type**
6-UASF | 2-Pipe Snow Fence
6-UASFU | Unitized Snow Fence

*Special Order
 (Specify color when ordering)
 Thickness: Default = 60 Mil

FLASHINGS & VENTS

IB Recover Membrane Vent



Only available in two-way style. Made of Heavy Duty UV Stabilized PVC. Cap is permanently attached. An IB Membrane Target Patch is dielectrically welded to the flange.

Product No	Type	Color	Weight (lbs)
5-05PVCW-R	5" Vent	White	2
5-05PVCG-R	5" Vent	Gray	2
5-05PVCT-R	5" Vent	Tan	2
5-05PVCS-R	5" Vent	Cool Sand	2
5-05PVCSO-R	5" Vent	Cool Stone	2
5-05PVCCGW-R	5" Vent	ChemGuard	2
5-05PVCBNZ-R	5" Vent	Bronze	2
5-05PVCTC-R	5" Vent	Terra Cotta	2

Note:
 * IB Requires 1 for every 1,000 sq ft on mechanically attached and recover assemblies.




White Vents:
 Base - White, Cool Sand, Cool Stone

Gray Vents: Base - Gray

Black Vents: Base - Brown, Red, Green

Tan Vents: Base - Tan

IB 10" Roof Vent



Super Heavy Duty UV Stabilized PVC with integral insect resistant scree. Deck flange includes pre-drilled holes for easy attachment to the roof deck. Cap is permanently attached to resist damage. Comes with an IB membrane target patch dielectrically welded to the flange. Net free ventilation area of 52 square inches per vent.

Product No	Type	Color	Weight (lbs)
5-08PVCW-R	10" Vent	White	7
5-08PVCG-R	10" Vent	Gray	7
5-08PVCT-R	10" Vent	Tan	7
5-08PVCS-R	10" Vent	Cool Sand	7
5-08PVCSO-R	10" Vent	Cool Stone	7
5-08PVCCGW-R	10" Vent	ChemGuard	7
5-08PVCBNZ-R	10" Vent	Bronze	7
5-08PVCTC-R	10" Vent	Terra Cotta	7



White Vents:
 Base - White, Cool Sand, Cool Stone

Gray Vents:
 Base - Gray

Tan Vents:
 Base - Tan

Black Vents:
 Base - Brown, Red, Green

E-Curb Kits - 4" Round




IB E-Curb System penetration seals replace old-style metal pitch pans with versatile precast components and pourable sealants. The E-Curb System can usually be installed in under 15 minutes and is available in convenient kits.

Product No	Type	Weight (lbs)
4-ECURB4	4" Round Kit	9

*Special Order

Includes:
 M-1 & pourable sealant, 4 sets of bases  Requires ground shipping/additional shipping

E-Curb Kits - 6" Round



IB E-Curb System penetration seals replace old-style metal pitch pans with versatile precast components and pourable sealants. The E-Curb System can usually be installed in under 15 minutes and is available in convenient kits.

Product No	Type	Weight (lbs)
4-ECURB6	6" Round Kit	12

*Special Order

Includes:
 M-1 & pourable sealant, 3 sets of bases  Requires ground shipping/additional shipping

FLASHINGS & VENTS

IB Dryer Vent / Exhaust Vent & Vent No-Cone



Heavy-duty metal two-piece general purpose roof exhaust vent consisting of a Kynar 500® finished vent hood shipped with a ready to install galvanized flanged metal base. It comes equipped with an integral clamping band for easy, quick installation over factory fabricated IB PVC no-cone flashings. Vent hood is removable as required for general maintenance or periodic cleaning.

- *Note: Two Part Item
- Part 1: IB Dryer Vent
 - Part 2: IB Vent No-Cone

Product No	Type	Color	Weight (lbs)
5-04DEW	4" Vent & Hood	White	5
5-04DEG	4" Vent & Hood	Gray*	5
5-04DET	4" Vent & Hood	Tan*	5
5-04DEBLK	4" Vent & Hood	Black*	5
*Special Order			
5-06DEW	6" Vent & Hood	White*	6
5-06DEG	6" Vent & Hood	Gray*	6
5-06DET	6" Vent & Hood	Tan*	6
5-06DEBLK	6" Vent & Hood	Black*	6
5-08DEW	8" Vent & Hood	White*	7
5-08DEG	8" Vent & Hood	Gray*	7
5-08DET	8" Vent & Hood	Tan*	7
5-08DEBLK	8" Vent & Hood	Black*	7

Features:

- Built-in back draft dampers close when not in use
- Can be used for dryer, kitchen and bath exhaust vent
- 4" drop for easy connection to exhaust duct

Packaging:

One unit per box - includes vent hood, base, and optional screens for non-dryer use application

Hood Colors: * Brown and Black add \$5 charge



IB Vent No-Cone

Product No	Type	Color	Weight (lbs)
4-4DVW-R	4" No-Cone	White	1
4-4DVG-R	4" No-Cone	Gray	1
4-4DVT-R	4" No-Cone	Tan	1
4-4DVS-R	4" No-Cone	Cool Sand	1
4-4DVSTO-R	4" No-Cone	Cool Stone	1
4-4DVCGW-R	4" No-Cone	ChemGuard	1
4-4DVBNZ-R	4" No-Cone	Bronze	1
4-4DVTC-R	4" No-Cone	Terra Cotta	1

Made to Order

4-6DVW-R	6" No-Cone	White	1
4-6DVG-R	6" No-Cone	Gray	1
4-6DVT-R	6" No-Cone	Tan	1
4-6DVS-R	6" No-Cone	Cool Sand	1
4-6DCSTO-R	6" No-Cone	Cool Stone	1
4-6DVCG-R	6" No-Cone	ChemGuard	1
4-6DVBNZ-R	6" No-Cone	Bronze	1
4-6DVBNZ-R	6" No-Cone	Terra Cotta	1


4-8DVW-R	8" No-Cone	White	1
4-8DVG-R	8" No-Cone	Gray	1

Colors: * No Cone colors



DRAINS

2" IB Retrofit Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-2RFDW-R	Drain Target	White	11
5-2RFDG-R	Drain Target	Gray	11
5-2RFDT-R	Drain Target	Tan	11
5-2RFDS-R	Drain Target	Cool Sand	11
5-2RFDSTO-R	Drain Target	Cool Stone	11
5-2RFDCGW-R	Drain Target	ChemGuard	11
5-2RFDNBZ-R	Drain Target	Bronze	11
5-2RFDTC-R	Drain Target	Terra Cotta	11

Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



3" IB Retrofit Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-3RFDW-R	Drain Target	White	11.3
5-3RFDG-R	Drain Target	Gray	11.3
5-3RFDT-R	Drain Target	Tan	11.3
5-3RFDS-R	Drain Target	Cool Sand	11.3
5-3RFDSTO-R	Drain Target	Cool Stone	11.3
5-3RFDCGW-R	Drain Target	ChemGuard	11.3
5-3RFDNBZ-R	Drain Target	Bronze	11.3
5-3RFDTC-R	Drain Target	Terra Cotta	11.3

Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



4" IB Retrofit Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-4RFDW-R	Drain Target	White	11
5-4RFDG-R	Drain Target	Gray	11
5-4RFDT-R	Drain Target	Tan	11
5-4RFDS-R	Drain Target	Cool Sand	11
5-4RFDSTO-R	Drain Target	Cool Stone	11
5-4RFDCGW-R	Drain Target	ChemGuard	11
5-4RFDNBZ-R	Drain Target	Bronze	11
5-4RFDTC-R	Drain Target	Terra Cotta	11


Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



5" IB Retrofit Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-5RFDW-R	Drain Target	White	12
5-5RFDG-R	Drain Target	Gray	12
5-5RFDT-R	Drain Target	Tan	12
5-5RFDS-R	Drain Target	Cool Sand	12
5-5RFDSTO-R	Drain Target	Cool Stone	12
5-5RFDCGW-R	Drain Target	ChemGuard	12
5-5RFDNBZ-R	Drain Target	Bronze	12
5-5RFDTC-R	Drain Target	Terra Cotta	12

***Special Order**

Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



DRAINS

6" IB Retrofit Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-6RFDW-R	Drain Target	White	12.3
5-6RFDG-R	Drain Target	Gray	12.3
5-6RFDT-R	Drain Target	Tan	12.3
5-6RFDS-R	Drain Target	Cool Sand	12.3
5-6RFDSTO-R	Drain Target	Cool Stone	12.3
5-6RFD CGW-R	Drain Target	ChemGuard	12.3
5-6RFD BNZ-R	Drain Target	Bronze	12.3
5-6RFDTC-R	Drain Target	Terra Cotta	12.3

*Special Order


Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



2" IB Retrofit Overflow Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-2RFD OFW-R	Drain Target	White	18
5-2RFD OG-R	Drain Target	Gray	18
5-2RFD OT-R	Drain Target	Tan	18
5-2RFD OS-R	Drain Target	Cool Sand	18
5-2RFD OSTO-R	Drain Target	Cool Stone	18
5-2RFD OCGW-R	Drain Target	ChemGuard	18
5-2RFD BNZ-R	Drain Target	Bronze	18
5-2RFDTC-R	Drain Target	Terra Cotta	18


Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target
- 2" drain comes with a 2" wide band of high density expanding foam tape in place of the ProSeal rubber seal

Colors:



3" IB Retrofit Overflow Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-3RFD OW-R	Drain Target	White	18.3
5-3RFD OG-R	Drain Target	Gray	18.3
5-3RFD OT-R	Drain Target	Tan	18.3
5-3RFD OS-R	Drain Target	Cool Sand	18.3
5-3RFD OSTO-R	Drain Target	Cool Stone	18.3
5-3RFD OCGW-R	Drain Target	ChemGuard	18.3
5-3RFD BNZ-R	Drain Target	Bronze	18.3
5-3RFDTC-R	Drain Target	Terra Cotta	18.3


Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



4" IB Retrofit Overflow Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-4RFD OFW-R	Drain Target	White	18.6
5-4RFD OFG-R	Drain Target	Gray	18.6
5-4RFD OFT-R	Drain Target	Tan	18.6
5-4RFD OFS-R	Drain Target	Cool Sand	18.6
5-4RFD OFSTO-R	Drain Target	Cool Stone	18.6
5-4RFD OFCGW-R	Drain Target	ChemGuard	18.6
5-4RFD BNZ-R	Drain Target	Bronze	18.6
5-4RFDTC-R	Drain Target	Terra Cotta	18.6

Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target


Colors:



DRAINS

DRAINS

5" IB Retrofit Overflow Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-5RFDOW-R	Drain Target	White	19
5-5RFDOG-R	Drain Target	Gray	19
5-5RFDOT-R	Drain Target	Tan	19
5-5RFDOS-R	Drain Target	Cool Sand	19
5-5RFDOSTO-R	Drain Target	Cool Stone	19
5-5RFDOCGW-R	Drain Target	ChemGuard	19
5-5RFDOFBNZ-R	Drain Target	Bronze	19
5-5RFDOFTC-R	Drain Target	Terra Cotta	19

*Special Order


Features:

- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



6" IB Retrofit Overflow Drain & Target



Designed as an option for installation into various sized existing leader pipes. Constructed from a heavy-duty one-piece spun aluminum body with cast aluminum clamping rings. Factory applied IB retrofit drain target sheet for easy weldable application.

Product No	Type	Color	Weight (lbs)
5-6RFDOW-R	Drain Target	White	19.3
5-6RFDOG-R	Drain Target	Gray	19.3
5-6RFDOT-R	Drain Target	Tan	19.3
5-6RFDOS-R	Drain Target	Cool Sand	19.3
5-6RFDOSTO-R	Drain Target	Cool Stone	19.3
5-6RFDOCGW-R	Drain Target	ChemGuard	19.3
5-6RFDOFBNZ-R	Drain Target	Bronze	19.3
5-6RFDOFTC-R	Drain Target	Terra Cotta	19.3

*Special Order

Features:


- One-piece seamless heavy-duty body manufactured from 0.81 ga spun aluminum
- Extra large 16" diameter drain flange
- Factory applied and sealed reinforced 23" x 23" IB membrane target

Colors:



DRAINS

2" IB Drain Liner & Drop Scupper



Fabricated with round straight tube leaders and a reinforced IB PVC Single-Ply target flashing that allows for easy application.

Drop length 10"

Product No	Type	Color	Weight (lbs)
5-DS2	2" Drop Scupper		0.48


2" IB Drain Liner

5-DL2W-R	2" Drain Liner	White	1
5-DL2G-R	2" Drain Liner	Gray	1
5-DL2T-R	2" Drain Liner	Tan	1
5-DL2S-R	2" Drain Liner	Cool Sand	1
5-DL2STO-R	2" Drain Liner	Cool Stone	1
5-DL2CGW-R	2" Drain Liner	ChemGuard	1
5-DL2BNZ-R	2" Drain Liner	Bronze	1
5-DL2TC-R	2" Drain Liner	Terra Cotta	1

Colors:



3" IB Drain Liner & Drop Scupper



Fabricated with round straight tube leaders and a reinforced IB PVC Single-Ply target flashing that allows for easy application.

Drop length 10"

Product No	Type	Color	Weight (lbs)
5-DS3	3" Drop Scupper		0.56


3" IB Drain Liner

5-DL3W-R	3" Drain Liner	White	1
5-DL3G-R	3" Drain Liner	Gray	1
5-DL3T-R	3" Drain Liner	Tan	1
5-DL3S-R	3" Drain Liner	Cool Sand	1
5-DL3STO-R	3" Drain Liner	Cool Stone	1
5-DL3CGW-R	3" Drain Liner	ChemGuard	1
5-DL3BNZ-R	3" Drain Liner	Bronze	1
5-DL3TC-R	3" Drain Liner	Terra Cotta	1

Colors:



4" IB Drain Liner & Drop Scupper



Fabricated with round straight tube leaders and a reinforced IB PVC Single-Ply target flashing that allows for easy application.

Drop length 10"

Product No	Type	Color	Weight (lbs)
5-DS4	4" Drop Scupper		1

4" IB Drain Liner

5-DL4W-R	4" Drain Liner	White	1
5-DL4G-R	4" Drain Liner	Gray	1
5-DL4T-R	4" Drain Liner	Tan	1
5-DL4S-R	4" Drain Liner	Cool Sand	1
5-DL4STO-R	4" Drain Liner	Cool Stone	1
5-DL4CGW-R	4" Drain Liner	ChemGuard	1
5-DL4BNZ-R	4" Drain Liner	Bronze	1
5-DL4TC-R	4" Drain Liner	Terra Cotta	1

Colors:



2" IB Wood Deck Drain



- Galvanized steel flange fastens to deck
- Surface membrane clamp secures finish covering
- 5" diameter corrosion resistant heel proof aluminum grate
- 2" ABGS socket outlet


Product No	Type	Color	Weight (lbs)
5-2DD	4" Drop Scupper	Gray	1

Colors:



METALS

IB Clad Drip Edge Metal



Fabricated with a durable 45 mil non-reinforced IB PVC film with acrylic finish, laminated to 24 gauge, G90 galvanized sheet metal. Formed into standard metal drip edge profile with a hemmed kick-out at the bottom to provide a corrosion resistant, heat-weldable perimeter roof edge termination.


Product No	Type	Color	Weight (lbs)
2-2.5DEKO	2.5" Drip Edge	White	6
2-B2.5DEKO	2.5" Drip Edge	Bronze	6
2-T2.5DEKO	2.5" Drip Edge	Tan	6
2-G2.5DEKO	2.5" Drip Edge	Gray	6
2-4DEKO	4" Drip Edge	White	7.5
2-B4DEKO	4" Drip Edge	Bronze	7.5
2-T4DEKO	4" Drip Edge	Tan	7.5
2-G4DEKO	4" Drip Edge	Gray	7.5

**Custom sizes available - Special Order*

Colors:



IB Clad Drip Edge Stainless Steel Metal



Fabricated with a durable 45 mil non-reinforced IB PVC film with acrylic finish, laminated to 24 gauge, 304 Stainless Steel sheet metal. It is formed into standard metal drip edge profile with a hemmed kick-out at the bottom to provide a corrosion resistant, heat-weldable perimeter roof edge termination.

Product No	Type	Color	Weight (lbs)
2-SS2.5DEKO	2.5" SS Drip Edge	White	6
2-SS4DEKO	4" SS Drip Edge	White	7.5

Colors:

AnchorTite® Drip Edge



The patented extruded aluminum anchor bar securely terminates the IB PVC membrane, providing protection superior to any other manufactured or shopfabricated roof edge. The low profile roofing flange allows for water drainage as needed for drip edge conditions.

Product No	Size	Weight (lbs)
2-AT3	3"	6
2-AT4.5	4.5"	9
2-AT6	6"	12

Features:

- 12' lengths with pre-punched holes for quicker installation.
- Covers available in 24 ga. steel and .040 aluminum
- Radiused and specially fabricated options available
- A 30 year Kynar 500® finish warranty is included on coil-coated standard colors.

**Special Order, Must order by 12ft Lengths.*


**Anodized finish cannot guarantee a color match due to manufacturing process.*

Colors:



~ 30 Standard Colors Available, Call for Color Chart or Sample.

IB Clad Gravel Stop Stainless Steel Metal




Fabricated with a durable 45 mil non-reinforced IB PVC film with acrylic finish, laminated to 24 gauge, 304 Stainless Steel sheet metal. It is formed into a gravel stop edge profile with 3/4" rise and a hemmed kick-out at the bottom to provide a corrosion resistant, heat-weldable perimeter roof edge termination.

Product No	Type	Color	Weight (lbs)
2-SS2.5GSKO	2.5" SS Gravel Stop	White	6
2-SS4GSKO	4" SS Gravel Stop	White	8

Colors:

IB Clad Gravel Stop Metal



Fabricated with a durable 45 mil non-reinforced IB PVC film with acrylic finish, laminated to 24 gauge, G90 galvanized sheet metal. Formed into a gravel stop edge profile with 3/4" rise and a hemmed kick-out at the bottom to provide a corrosion resistant, heat-weldable perimeter roof edge termination.


Product No	Type	Color	Weight (lbs)
2-2.5GSKO	2.5" Gravel Stop	White	7.75
2-B2.5GSKO	2.5" Gravel Stop	Bronze	7.75
2-T2.5GSKO	2.5" Gravel Stop	Tan	7.75
2-G2.5GSKO	2.5" Gravel Stop	Gray	7.75
2-4GSKO	4" Gravel Stop	White	9.25
2-B4GSKO	4" Gravel Stop	Bronze	9.25
2-T4GSKO	4" Gravel Stop	Tan	9.25
2-G4GSKO	4" Gravel Stop	Gray	9.25

Custom sizes available - Special Order

Colors:



IB PVC Clad Metal 4x10 Sheet



Fabricated from 24 gauge galvanized sheet metal with a durable 45 mil non-reinforced IB PVC film with acrylic finish laminated to the top surface.

Product No	Type	Color
2-45CM10	Clad Metal	White
2-95SS	SS Clad Metal	White
2-B45CM10	Clad Metal	Bronze
2-T45CM10	Clad Metal	Tan
2-G45CM10	Clad Metal	Gray

**MOQ 10 Sheet*

Features:

- Durable 45 mil IB PVC non-reinforced film laminated to metal
- Acrylic finish top surface
- Easily fabricated into various profiles and flashings

Colors:




Packaging:

- Sold in 10 or 50 sheet bundles
- Sheets size 4x10
- 50 sheets / pallet
- 53 lbs / sheet

METALS

*All IB Clad Metal, IB Termination Bar, and Cleat comes in 10ft lengths


IB Metal Cleat



Assembly consists of IB Clad Drip Edge formed into a metal profile to provide a clean, durable edge termination with a hemmed kick-out designed for use with continuous metal cleats.

Product No	Type	Weight (lbs)
2-2.5GALVCLEAT	2.5" Galvanized Cleat	3.5
2-4GALVCLEAT	4" Galvanized Cleat	6

IB Aluminum Termination Bar




Designed to terminate Single-Ply membrane to parapet walls and other penetrations.

Product No	Type	Weight (lbs)
2-8TBALUM	1" Aluminum Term Bar	1.1

Features:

- Made of extruded aluminum with a mil finish
- Oval holes that measure 1/4" x 3/8" are punched into each bar, with a standard spacing of 6" or 12" on center
- Can be made to order with special hole spacing

IB Stainless Steel Cleat



Assembly consists of a stainless steel IB Clad Drip Edge formed into a metal profile to provide a clean, durable edge termination with a hemmed kick-out designed for use with continuous metal cleats.

Product No	Type	Weight
2-2.5SSCLEAT	2.5" Stainless Cleat	5
2-4SSCLEAT	4" Stainless Cleat	6

IB Clad Termination Bar



Fabricated from 24 gauge, G90 galvanized sheet metal with a durable 45 mil non-reinforced IB PVC film with acrylic finish laminated to the top surface. Bars are 2" wide with a hemmed caulk lip on the top and a hemmed bottom edge and can be installed over membrane flashings at vertical surfaces.

Product No	Type	Color
2-8TBPVC	2" KO Clad Term Bar	White
2-T8TBPVC	2" KO Clad Term Bar	Tan
2-G8TBPVC	2" KO Clad Term Bar	Gray
2-B8TBPVC	2" KO Clad Term Bar	Bronze
2-8SSTBPVC	2" KO SS Clad Term Bar	White

Features:

- Durable 45 mil IB PVC non-reinforced film laminated to metal
- Acrylic finish top surface
- Installed either on top or underneath the roofing membrane

Packaging:


Sold as individual sections
50 pieces / box
3 lbs / piece

Colors:



CUSTOMS

CUSTOM CONE FLASHINGS (Decking cones priced 2x higher due to material cost)

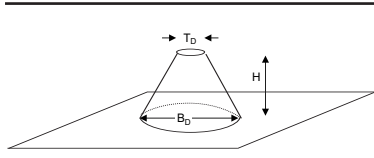

Custom Pipe Cone made from IB PVC

To price this product, measure and add the **D2 + Height**. Total inches equals the size of small, medium, Large or Extra-Large.

Colors:



Custom Cones 0-15" small

Product No	Size (inches)
C-CSM / C-80CSM	0-15

Custom Cones 27-29" x-large

Product No	Size (inches)
C-CXL / C-80CXL	27-29

Custom Cones 37-39" MG-medium

Product No	Size (inches)
C-CMGMD	37-39"

Custom Cones 16-22" medium

Product No	Size (inches)
C-CM / C-80CM	16-22

Custom Cones 30-32" xx-large

Product No	Size (inches)
C-CXXL	30-32

Custom Cones 40-44" MG-large

Product No	Size (inches)
C-CMGL	40-44"

Custom Cones 23-26" large

Product No	Size (inches)
C-CLG / C-80CLG	23-26


Custom Cones 33-36" MG-small

Product No	Size (inches)
C-CMGSM	33-36"

Custom Cones 45-47" MG-xlarge

Product No	Size (inches)
C-CMGXL	0-18

CUSTOM OVERFLOW SCUPPER



Custom overflow scupper made from IB PVC and metal

To price this product, measure and multiply the **Length + Width + Height**. Total inches equals the size of small, medium, Large or Extra-Large.

Colors:



Custom Overflow Scupper 0-20" small

Product No	Size (inches)
C-OFSSM / C-80OFSSM	0-20

Custom Overflow Scupper 41-45" MG-small

Product No	Size (inches)
C-OFSMGSM	41-45

Custom Overflow Scupper 21-25" medium

Product No	Size (inches)
C-OFMSD / C-80OFMSD	21-25

Custom Overflow Scupper 46-50" MG-medium

Product No	Size (inches)
C-OFSMGMD	46-50

Custom Overflow Scupper 26-30" large

Product No	Size (inches)
C-OFSLG / C-80OFSLG	26-30

Custom Overflow Scupper 51-55" MG-large

Product No	Size (inches)
C-OFSMGLG	51-55

Custom Overflow Scupper 31-35" x-large

Product No	Size (inches)
C-OFSXL / C-80OFSXL	31-35


Custom Overflow Scupper 56-60" MG-xlarge

Product No	Size (inches)
C-OFSMGXL	56-60

Custom Overflow Scupper 36-40" xx-large

Product No	Size (inches)
C-OFSXXL	36-40

CUSTOM THROUGH WALL SCUPPER



Custom through wall scupper made from IB PVC and metal

To price this product, measure and multiply the **Length + Width + Height**. Total inches equals the size of small, medium, Large or Extra-Large.

Colors:



Custom Through Wall Scupper 0-20" small

Product No | Size (inches)
C-TWSSM / C-80TWSSM | 0-20

Custom Through Wall Scupper 21-25" medium

Product No | Size (inches)
C-TWSMD / C-80TWSMD | 21-25

Custom Through Wall Scupper 26-30" large

Product No | Size (inches)
C-TWSLG / C-80TWSLG | 26-30

Custom Through Wall Scupper 31-35" x-large

Product No | Size (inches)
C-TWSXL / C-80TWSXL | 31-35

Custom Through Wall Scupper 36-40" xx-large

Product No | Size (inches)
C-TWSXXL | 0-20

Custom Through Wall Scupper 41-45" MG-small

Product No | Size (inches)
C-TWSMGSM | 41-45

Custom Through Wall Scupper 46-50" MG-medium

Product No | Size (inches)
C-TWSMGMD | 46-50


Custom Through Wall Scupper 51-55" MG-large

Product No | Size (inches)
C-TWSMGLG | 31-35

Custom Through Wall Scupper 56-60" MG-xlarge

Product No | Size (inches)
C-TWSMGXL | 56-60

CUSTOM 2 SIDED THROUGH WALL SCUPPER W/CLAD DROP



Custom through wall scupper made from IB PVC and metal

To price this product, measure and multiply the **Length + Width + Height**. Total inches equals the size of small, medium, Large or Extra-Large.

Colors:



Custom 2 Sided Through Wall Scupper w/Clad Drop 0-20" small

Product No | Size (inches)
C-TWSDSM | 0-20

Custom 2 Sided Through Wall Scupper w/Clad Drop 21-25" medium

Product No | Size (inches)
C-TWSDMD | 21-25

Custom 2 Sided Through Wall Scupper w/Clad Drop 26-30" large

Product No | Size (inches)
C-TWSDLG | 26-30

Custom 2 Sided Through Wall Scupper w/Clad Drop 31-35" x-large

Product No | Size (inches)
C-TWSDXL | 31-35

Custom 2 Sided Through Wall Scupper w/ Clad Drop 36-40" xx-large

Product No | Size (inches)
C-TWSDXXL | 36-40

Custom 2 Sided Through Wall Scupper w/Clad Drop 41-45" MG-small

Product No | Size (inches)
C-TWSDMGSM | 41-45

Custom 2 Sided Through Wall Scupper w/Clad Drop 46-50" MG-medium

Product No | Size (inches)
C-TWSDMGMD | 46-50

Custom 2 Sided Through Wall Scupper w/Clad Drop 51-55" MG-large


Product No | Size (inches)
C-TWSDMGLG | 51-55

Custom 2 Sided Through Wall Scupper w/Clad Drop 56-60" MG-xlarge

Product No | Size (inches)
C-TWSDMGXL | 51-55

CUSTOMS

CUSTOM DRAIN LINER (Drain Liner priced 2x higher due to material cost)



Custom Drain Liner made from IB PVC

To price this product, measure and add the **D1 + Height**. Total inches equals the size of small, medium, Large or Extra-Large.

Colors:



Custom Drain Liner 0-12" small

Product No | Size (inches)
C-DLSM / C-80DLSM | 0-12

Custom Drain Liner 15-16" large

Product No | Size (inches)
C-DLLG | 15-16

Custom Drain Liner 13-14" medium


Product No | Size (inches)
C-DLMD | 13-14

Custom Drain Liner 17-18" x-large

Product No | Size (inches)
C-DLXL | 17-18

CUSTOM METALS *For coping cap \$250 crate fee - optional add for drip edge*

DRIP EDGE



Fabricated from 24 gauge, G90 galvanized sheet metal with a durable 45 mil non-reinforced IB PVC film with acrylic finish laminated to the top surface.

To price this product, measure the total number of inches as if it was flat (Stretch out) A+B+C. Multiply the price of the metal by the inch. Add \$2 per bend in the metal for the total price per piece.

Stretch out X price per inch + number of bends + \$5.00 custom fee

Price Example: (price per inch x amount of inches) + (\$2 x per bend) + \$5 custom fee
A=3" B=3" + C = 1" = total 7" | \$3.13 x 7 inches = \$21.91 + \$2.00 x 3 bends = \$6.00
Total price: \$21.91 + \$6.00 = \$27.91 + \$5 custom fee = \$32.91

Custom PVC Clad Metal

Product No
C-MW

Color:



Custom PVC Clad Stainless Metal

Product No
C-MSS

Color:



Custom PVC Clad Metal Color

Product No
C-MC

Colors:




Custom Cleat Metal

Product No
C-GALCLEAT

Custom Cleat Stainless Metal

Product No
C-SSCLEAT

CUSTOM CLAD METAL DROP SCUPPER ROUND



Custom Clad Metal Drop Scupper Round with a metal drop base and membrane skirt.

To price this product, measure **D1**. Total inches equals the size of small, medium, or large.

Colors:



Custom Clad Metal Drop Scupper Round 0-4" small

Product No | Size (inches)
C-CDSRSM | 0-4

Custom Clad Metal Drop Scupper Round 4-7" medium


Product No | Size (inches)
C-CDSRMD | 4-7

Custom Clad Metal Drop Scupper Round 7-10" large

Product No | Size (inches)
C-CDSRLG | 7-10

CUSTOMS

CUSTOM IB PITCH PAN



Fabricated from IB PVC Clad Metal constructed with durable 45 mil non-reinforced IB PVC film laminated to 24 gauge, G90 coated galvanized sheet metal.

To price this product, measure and add the **Length+Width+Height** Total inches equals the size of small, medium, Large or Extra-Large

Custom Pitch Pan 0-12" small

Product No | Size (inches)
C-PPSM | 0-12

Custom Pitch Pan 13-16" medium

Product No | Size (inches)
C-PPMD | 13-16

Custom Pitch Pan 17-20" large

Product No | Size (inches)
C-PPLG | 17-20

Custom Pitch Pan 21-24" x-large

Product No | Size (inches)
C-PPXL | 21-24

Custom Pitch Pan 25-28" xx-large

Product No | Size (inches)
C-PPXXL | 25-28

Custom Pitch Pan 29-32" MG-small

Product No | Size (inches)
C-PPMGSM | 29-32

Custom Pitch Pan 33-36" MG-medium

Product No | Size (inches)
C-PPMGMD | 33-36

Custom Pitch Pan 37-40" MG-large

Product No | Size (inches)
C-PPMGLG | 37-40

Custom Pitch Pan 41-44" MG-xlarge

Product No | Size (inches)
C-PPMGXL | 41-44


Colors: Membrane



Colors: Metal



CUSTOM POST FLASHING



Custom post flashing made from IB PVC.

To price this product, measure and add the **Length + Width + Height**. Total inches equals the size of small, medium, Large or Extra-Large.

Post Flashing 0-30" small

Product No | Size (inches)
C-PFSM / C-80PFSM | 0-30

Post Flashing 31-42" medium

Product No | Size (inches)
C-PFMD / C-80PFMD | 31-42

Post Flashing 43-50" large

Product No | Size (inches)
C-PFLG / C-80PFLG | 43-50

Post Flashing 51"+ x-large

Product No | Size (inches)
C-PFXL / C-80PFXL | 51+

Colors:



CUSTOMS

COATING

SILICONE COATING

IB Silicone



Is a high performance, high solids, single component, moisture cure fluid applied silicone elastomeric coating that is designed to help reduce surface temperatures thereby minimizing thermal expansion and contraction while providing exceptional resistance to UV degradation and long lasting and preventative solutions for the renewal and maintenance of many roof types. Meets or exceeds ASTM D-6694

Item Code	Description / Color	Size	Weight	Pallet
9-SILCG5	IB Silicone Coating Gray	5-gal	56.5 lbs	36
9-SILCT5	IB Silicone Coating Tan	5-gal	56.5 lbs	36
9-SILCW5	IB Silicone Coating White	5-gal	56.5 lbs	36
9-SILCG55	IB Silicone Coating Gray	55-gal	650.5 lbs	4
9-SILCT55	B Silicone Coating Tan	55-gal	650.5 lbs	4
9-SILCW55	B Silicone Coating White	55-gal	650.5 lbs	4
9-SILCG275	IB Silicone Coating Gray	275 gal	3260 lbs	1
9-SILCT275	IB Silicone Coating Tan	275 gal	3260 lbs	1
9-SILCW275	IB Silicone Coating White	275 gal	3260 lbs	1

Features:

- Ponding water resistant
- Excellent adhesion to a variety of substrates
- No mixing required (up to 6 months)
- Low VOC, less than 50 grams/liter
- 90% solids by volume
- Excellent sag resistance

Colors:



IB Silicone FG



Is a performance, moisture curing, 100% silicone, flashing grade mastic that is designed to seal all seams and fasteners on roofs in conjunction with IB Silicone systems.

Item Code	Description / Color	Size	Weight
9-SILCFG2	Fibered Silicone Flashing Grade Gray	2-gal	22.0 lbs
9-SILCFGW2	IB Silicone FG Coating White	2-gal	22.0 lbs

Features:

- Plasticizer free
- 90% solids by volume
- Brush-able/trowel-able
- Excellent adhesion to a variety of substrates
- Unique formulation allows breathable film while providing a watertight membrane and permitting trapped moisture to escape
- In most cases, eliminates need for 3 course application of fabric reinforcement of seams and flashings.
- Low VOC compliant, less than 50 grams/liter

Colors:



IB Sealer



Is a high performance, plasticizer free, single component, 97% solids moisture-curing and self-leveling sealant/adhesive that is designed to seal all seams, fasteners, ridge caps, flashings, and penetrations on all types of roof substrates in conjunction with IB Acrylic or IB Silicone coatings.

Item Code	Description / Color	Size	Weight	Pallet
9-SEALERW10	IB Seal White	10 fl. oz. tube	29 lbs/case	30/case; 60 cases/ PLT
9-SEALERW25	IB Seal White	2.5-gal	30 lbs	60

Features:

- Plasticizer free
- 97% solids
- Permanently Flexible
- Excellent adhesion, highly elastic, and high strength
- Bonds to damp surfaces and is an excellent emergency repair product
- In most cases, eliminates need for 3 course application of fabric reinforcement of seams and flashings.
- Can be applied to most surfaces without priming
- Non staining and mildew resistant
- UV resistant
- Low VOC compliant

Colors:



Minimum for custom colors:
 Acrylics 220 gallons • Silicone 650 gallons • The special color minimum fee is \$3.00/gallon.

COATING

Acrylic COATING

IB Acrylic SW



A premium performance, plasticizer free, single component, water-based, 100% acrylic, elastomeric coating that is designed to help reduce surface temperatures thereby minimizing thermal expansion and contraction while providing exceptional resistance to uv degradation and long lasting and preventative solutions for the renewal and maintenance of many roof types. Meets or exceeds ASTM D-6083.


Item Code	Description / Color	Size	Weight	Pallet
9-ASWCS5	IB Acrylic Cool Sand*	5-gal	65 lbs	36
9-ASWW5	IB Acrylic White*	5-gal	65 lbs	36
9-ASWCS55	IB Acrylic Cool Sand*	55-gal	680 lbs	4
9-ASWW55	IB Acrylic White*	55-gal	680 lbs	4
9-ASWCS275	IB Acrylic Cool Sand*	275-gal	3300 lbs	1
9-ASWW275	IB Acrylic White*	275-gal	3300 lbs	1

*Climate Zone Restricted

Features:

- Plasticizer free
- 55% solids by volume
- Excellent adhesion to a variety of substrates
- Special biocide formulation helps retard discoloration and dirt retention
- Unique formulation allows breathable film while providing a watertight membrane and permitting trapped moisture to escape
- Low VOC, less than 50 grams/liter

Colors:



IB Acrylic FG



IB Acrylic FG is a high quality, single component, 100% acrylic flashing grade elastomeric coating that is designed to seal joints, seams on various roof types as well as fasteners on metal roofs.

Item Code	Description / Color	Size	Weight lbs	Pallet
9-ACFGW2	IB Acrylic FG White	2-gal	65 lbs	36
9-ACFGW5	IB Acrylic FG White	5-gal	690 lbs	4

Features:

- Plasticizer free
- 55% solids by volume
- Excellent adhesion to a variety of substrates
- Quick set technology allows coating to handle a light rain in as little as 30 minutes after application
- Unique formulation allows breathable film while providing a watertight membrane and permitting trapped moisture to escape
- Highest tensile and elongation properties for extremely durable and exceptional resistance to weathering
- Special biocide formulation helps retard discoloration and dirt retention
- Low VOC, less than 50 grams/liter

Colors:



IB Acrylic Pro




Is a high performance, plasticizer free, single component, water-based, 100% acrylic, elastomeric coating that is designed to help reduce surface temperatures thereby minimizing thermal expansion and contraction while providing exceptional resistance to UV degradation and long lasting and preventative solutions for the renewal and maintenance of many roof types. Meets or exceeds ASTM D-6083.

Item Code	Description / Color	Size	Weight	Pallet
9-APROG	IB Acrylic Pro Gray	5-gal	65 lbs	36
9-APROT	IB Acrylic Pro Tan	5-gal	65 lbs	36
9-APROW	IB Acrylic Pro White	5-gal	65 lbs	36
9-APROG55	IB Acrylic Pro Gray	55-gal	680 lbs	4
9-APROT55	IB Acrylic Pro Tan	55-gal	680 lbs	4
9-APROW55	IB Acrylic Pro White	55-gal	680 lbs	4
9-APROG275	IB Acrylic Pro Gray	275-gal	3300 lbs	1
9-APROT275	IB Acrylic Pro Tan	275-gal	3300 lbs	1
9-APROW275	IB Acrylic Pro White	275-gal	3300 lbs	1

Features:

- Plasticizer free
- 53% solids by volume
- Excellent adhesion to a variety of substrates
- Special biocide formulation helps retard discoloration and dirt retention
- Unique formulation allows breathable film while providing a watertight membrane and permitting trapped moisture to escape
- Low VOC, less than 50 grams/liter

Colors:



COATINGS

COATING

IB Urethane Base Coat



Is a high performance, single component, moisture cure elastomeric polyurethane coating, that is designed to provide excellent adhesion, and flexibility to a variety of substrates. Has high elongation and high tensile strength properties which helps enhance the bonding of the IB Urethane Finish Coat.

Colors: Gray

Item Code	Description / Color	Size	Weight
9-UBCG5	IB Urethane Base Coat-Gray	5-gal	45 lbs
9-UBCG55	IB Urethane Base Coat-Gray	55-gal	600 lbs

Features:

- Moisture cure, polyurethane-based
- High elongation and high tensile strength properties
- Low viscosity helps penetrate into porous substrates and enhancing bonding properties
- Coverage: 1 gallon per 100 sq ft (16 wet mils)



IB Urethane Metal Primer



Is a high performance, single component, aluminum pigmented, moisture cure urethane, rust inhibiting primer that is designed as a primer coat over a variety of metal substrates to help reduce the corrosion process and enhance the bonding of the IB urethane finish coat.



Item Code	Description / Color	Size	Weight
9-UMP5	IB Moisture Cure Urethane Metal Primer	5-gal	56 lbs

Features:

- Moisture cure urethane-based
- Low viscosity helps penetrate pitted and rusted areas, as well as porous and scaly metals for greater corrosion resistance and bond enhancing properties
- Excellent adhesion to a variety of existing coatings and metal substrates
- Coverage: 0.25-0.5 gallons per 100 sq ft (4-8 wet mils)

IB Uni-Prime



Is a high performance, single component, solvent-based, polymer modified primer that is designed as a bond enhancing primer over single-ply membranes, existing non-siliconized coatings, aluminum, steel, galvanized metal, and painted metal surfaces.

**9-Week Lead Time*

Item Code	Description / Color	Size	Weight
9-UNIPR5	IB Uni-Prime	5-gal	46 lbs
9-UNIPR55	IB Uni-Prime	55-gal	468 lbs

Features:

- Specially formulated to block thermoplastic plasticizer migration that causes discoloration and failure of coatings
- Excellent bond enhancing properties
- Unique formulation allows breathable film while providing a watertight membrane and permitting trapped moisture to escape
- Coverage: 0.4-0.5 gallons per 100 sq ft (6-8 wet mils)

Colors: Light Red



IB Urethane Finish Coat



Is a high performance, single component, moisture cure elastomeric polyurethane coating, that is designed to provide excellent adhesion, and flexibility to a variety of substrates. Has high elongation and high tensile strength properties which helps enhance the bonding of the IB Urethane Finish Coat.

Item Code	Description / Color	Size	Weight
9-UFCW5	IB Urethane Finish Coat-White		45 lbs
9-UFCW55	IB Urethane Finish Coat-White		600 lbs
9-UALFC5	IB Urethane Alum Finish Coat		
9-UALFC55	IB Urethane Alum Finish Coat		

Features:

- Moisture cure, polyurethane-based
- High gloss finish
- High elongation and high tensile strength properties
- Excellent weathering and UV resistance
- Coverage: 1 gallon per 100 sq ft (16 wet mils)

Colors:



IB Seam Set FG



Is a high quality, single component, flashing grade moisture-cure polyurethane roof sealant that is designed to seal joints, seams and address angle changes and irregularly shaped penetration flashings on roofs in conjunction with IB Silicone or Urethane coatings.

Item Code	Description / Color	Size	Weight
9-SSFGG10	IB Seam Set FG Gray	10 oz	29 lbs/case
9-SSFGG25	IB Seam Set FG Gray	2.5 gal	18 lbs
9-SSFGG5	IB Seam Set FG Gray	5 gal	36 lbs

Features:

- Excellent adhesion to a variety of substrates
- Can be pumped and extruded for faster application
- UV stable
- Excellent sealant for metal gutters
- Low VOC compliant
- Excellent chemical resistance
- Coverage: 3.5 gallon per 100 sq ft (56 wet mils @ approx 1/16" Thickness)

Colors:



COATING

IB Bleed Block



Is a high performance, plasticizer free, single component, water-based, acrylic elastomeric base coating that is designed to help reduce asphaltic bleed through and discoloration of the acrylic or silicone finish coat.

Item Code	Description / Color	Size	Weight lbs
9-BBR5	IB Bleed Block Red	5-gal	60 lbs
9-BBR55	IB Bleed Block Red	55-gal	660 lbs
9-BBR275	IB Bleed Block Red	275-gal	3300 lbs

Features:

- Plasticizer free
- 55% solids by volume
- Excellent adhesion to a variety of substrates
- Special bleed resistant formulation helps retard asphaltic bleed through and discoloration of finish coats
- Unique formulation allows breathable film while providing a watertight membrane and permitting trapped moisture to escape
- Low VOC, less than 50 grams/liter
- Coverage: 1-1.5 gallons per 100 sq ft (16-24 wet mils)

Colors:



IB Rust Primer



Is a high performance, water-based, rust inhibiting low VOC primer that is designed as a primer coat over a variety of metal substrates to help reduce the corrosion process and enhance the bonding of the IB finish coat.

Item Code	Description / Color	Size	Weight
9-RPG5	IB Rust Primer Gray	5-gal	65 lbs
9-RPG55	IB Rust Primer Gray	55-gal	680 lbs

Features:

- Water Based
- Special cross linking formulation for greater corrosion resistance and bond enhancing properties
- 41% solids by volume
- Excellent adhesion to a variety of substrates
- Resists heat, cold, moisture and weathering
- Low VOC, less than 50 grams/liter
- Coverage: 0.5-0.75 gallons per 100 sq ft (8-12 wet mils)

Colors:



IB Roof Cleaner Wash Concentrate




Is a high performance, environmentally friendly cleaner that is formulated to remove heavy soils and contaminants in preparation of roofs prior to the application of roof coatings.

Item Code	Description / Color	Size	Weight
9-RCWC5	IB Roof Cleaner Wash Concentrate	5-gal	42.5 lbs

Features:

- Plasticizer free
- Biodegradable and environmentally friendly formulation
- All surfactants are approved on cleaningredients.org
- Zero VOC
- Low foaming formulation
- Excellent cleaning ability – removes paints and adhesives when used at full strength

Colors:



IB Fabric



Is a high quality, stitch bond polyester reinforcing fabric used in conjunction with IB Sealer and/or IB Coatings.

Item Code	Description / Color	Size	Weight	Pallet
9-FABR4	IB Fabric-4" White	4" x 324'	3	100
9-FABR6	IB Fabric-6" White	6" x 324'	4	42
9-FABR12	IB Fabric-12" White	12" x 324'	8	25
9-FABR40	IB Fabric-40" White	40" x 324'	35	25

Features:

- 3 oz./sq. yd. stitch bond polyester
- Medium soft which lays flat and conforms to surfaces easily
- Combines high strength and excellent elongation

Colors:



COATINGS

isoweld® Tool



New, revolutionary SFS Intec isoweld® field fastening system is an innovative induction welding system which welds prefastened PVC coated securement plates to IB PVC Single Ply membranes.

Product No	Type	Weight (lbs)
8-ISOWELD	Welding system	45
8-ISOMAG12	ISOweld Magnets	12

*Special Order

Features:

- 1-step calibration
- Hand-held inductor
- Constant monitoring of membrane surface temperature
- "x2" welding - two membrane thickness
- 3-way weld verification
- Plate-finding search function
- No "false positive" welds

isoweld® Backpack Tool



A power generator that is interchangeable with the isoweld® 3000 stand-up tool frame, replaceable closed cell foam shoulder straps with integral waist strap, and the original low profile hand-held inductor for detail work which converts to stand-up mode for ultimate productivity.

Product No	Type	Weight (lbs)
8-ISOPACK	backpack welding system	25

*Special Order

Features:

- Fastening is independent of membrane laps.
- Only one membrane width is required for the whole project
- No membrane penetration
- Reduced membrane overlaps
- Covering of the roof is independent of the fastening process and is therefore faster
- Fewer fastening points

Leister V2 Varimat Auto Welder w/Case



Roofing membranes can be welded faster, resulting in lower costs. Users appreciate its streamlined ergonomics and its ease of use. The operating unit's digital display allows for the control of temperature, airflow and speed.

Product No	Type	Weight (lbs)
8-AMV2	V2 Automatic Welder	135

*Special Order

Features:

- Slim-line design for welding in gaps as narrow as 4.3 inches
- Maintenance-free blower, no carbon brushes to replace
- User-friendly digital display that includes preset and configurable welding profiles for heat, speed and air volume
- Closed-loop system for continuous temperature monitoring
- Patented pendulum pressure roller applies pressure to the heated seam
- Drive motor strong enough to weld up to 30° slopes

Leister 300 120V Uniroof AT w/Case



Flexible partner for welding thermoplastic roofing membranes on flat or pitched roofs (up to 30°). Thanks to its slim design and construction, as well as the movable transport axle, converting of the machine is no longer needed. Now, you can effortlessly weld close to the edge (4 inches) at the parapet or on the parapet and as easily in narrow circumstances.

Product No	Type	Weight (lbs)
8-UNIE120V	Uniroof AT Welder	58

*Special Order

Features:

- Controlled technology with display guarantees a constant and reliable weld for a leak proof roof
- 100% Swiss made quality
- Powder-coated, rust-free stainless steel housing and rustproof components
- Lightweight and compact

Leister 300 230V Uniroof AT w/Case



Flexible partner for welding thermoplastic roofing membranes on flat or pitched roofs (up to 30°). Thanks to its slim design and construction, as well as the movable transport axle, converting of the machine is no longer needed. Now, you can effortlessly weld close to the edge (4 inches) at the parapet or on the parapet and as easily in narrow circumstances.

Product No	Type	Weight (lbs)
8-UNIE	Uniroof AT Welder	58

*Special Order

Features:

- Controlled technology with display guarantees a constant and reliable weld for a leak proof roof
- 100% Swiss made quality
- Powder-coated, rust-free stainless steel housing and rustproof components
- Lightweight and compact

Winco 12K Generator



The 15 gallon fuel tank provides 9 hours of run time at full load so you won't have to take unscheduled breaks to refuel. The factory installed lifting bar makes it easy to get this generator on and off the roof while the four wheel dolly kit makes maneuvering this generator easy. It is durable enough to handle the hours while providing clean power for sensitive equipment.

Product No	Weight (lbs)
8-WG1200HE	429

*Special Order

TOOLS

TOOLS

IB Hand Welder Kit



IB hand welder kit includes all of the items listed here. If you want individual items, use the individual product number.

Product No	Type	Weight (lbs)
8-WK	Hand Welder Kit 12	

INCLUDES

8-HWST	Leister 110V Hand Welder
8-HWN	40mm Nozzle
8-SHR	2" Seam Roller
8-SP	Seam Probe
8-MS	Membrane Sheers
8-TOOL BAG	Hand Welder Bag

Leister 110v Hand Welder ST



Primarily used for welding and plastic fabrication. This tool was developed with one idea always in mind: keep it simple. The TRIAC ST is a dependable, versatile, and user friendly hot air hand tool like its predecessor, the TRIAC S.

Product No	Type	Weight (lbs)
8-HWST	Triac ST Hand Welder	6.2

**Tip sold separately*

Leister Hand Welder Nozzle 40mm



1.5" (40mm) slot nozzle by Leister® can be used in combination with the Triac S, Triac ST and Triac AT.

Product No	Weight (lbs)
8-HWN	0.2

Leister Hand Welder Nozzle 20mm



3/4" (20mm) slot nozzle by Leister® can be used in combination with the Triac S

Product No	Weight (lbs)
8-HWN20	0.2

IB Hand Welder Bag Only



Heavy Duty tool bag with reinforced bottom for rooftop protection.

Product No	Type
8-TOOLBAG	Husky Backpack

HQ Seam Probe hardened tip and screw handle



Test seams to make sure they hold properly. Locate loose portions of seams for rework. Hand-held seam testers good for detail work in small areas. Fits a broom handle for standing testing and tempered to not wear down.

Product No
8-SPHQ

HQ Membrane Shears



Heavy Duty all metal manufactured specifically for commercial roofers. Hot drop forged from chrome-moly steel. Precision machined and hardened. Chrome finish resists corrosion. Adjustable screw.

Product No
8-MSHQ

Leister 220V Varimat Cord



220v 100' Extension cord for Leister power products

Product No	Weight (lbs)
8-AS-EXT	25
8-AS-EXT4P	25

**Special Order*

Flexible Metal Profile/Rib Autowelder Kit



Available for Uniroof Leister Autowelders for a 30mm seam width overlap weld.

Product No	Weight (lbs)
8-RIBKIT	3

**Special Order*

Kit includes:
Overlap Welding Nozzle
Pressure Roller
Axle
Flange

TOOLS

Millennium Spray Applicator (Hose Separate)



- Used to spray on Millennium PVC Adhesive.
- For use with Pressurized Cylinder
 - Applicator Tip and Hoses Sold Separately

Product No	Type
7-SPRAYER	Spray Applicator

Millennium Spray Hose, 12'



- Used to spray on Millennium PVC Adhesive.
- For use with Spray Applicator & Pressurized Cylinder

Product No	Type
7-SPRAYHOSE12	12' Steel Hose

Millennium Extended Spray Applicator (Hose Separate)



- Used to spray on Millennium PVC Adhesive.
- For use with Pressurized Cylinder
 - Applicator Tip and Hoses Sold Separately

Product No	Type
7-SPRAYEREXT	Millennium Extended Spray Applicator (Hose Separate)

Millennium Canister Flush Solution



A solvent-based solution designed for the convenient cleaning and flushing of spray adhesive applicators.

Product No	Type
7-SPRAYFLUSH	Adhesive Remover

IB Manual Millennium Heavy Duty Applicator



IB Millennium One Step™ Heavy Duty (Black) Manual Applicators are designed to be used with Millennium One Step™ Foamable Adhesives. They are powered by manually squeezing the trigger on the handle of the applicator which drives the piston rods.

Product No	Type
8-HDAPP	Manual Applicator

- Features:
- Center drive design
 - Lightweight and easy to use
 - Produces 900 pounds of thrust
 - Recommended for smaller jobs or congested areas

IB Battery Powered Millennium Applicator



Used to tighten IB Retrofit Drain. Battery Powered Single Bead Applicator for 1.5 L cartridge sets. Includes 2 rechargeable Li ion batteries and battery charger

Note: Battery has shipping restrictions
New weight (22 LB gross weight)

Product No	Type
8-EQ7075	Powered Applicator

*Special Order

- Features:
- Battery powered
 - Quick and easy use
 - Trigger delay
 - Durable construction
 - Strong motor
 - Portable, no cords or hoses
 - Saves time and labor
 - Saves battery charge
 - Withstands everyday use
 - Can dispense higher viscosity adhesives

TOOLS

IB Retrofit Drain Screwdriver



The extra long screwdriver has a square socket tip (#2 Robertson) for tightening the recess head screws on the compression seal. The 12 1/2" shaft of the screwdriver allows for ease of reach when tightening the Seal connection screws on all retrofit products. The screwdriver comes complete with a loss prevention bar.

Product No
8-RFDS

Hand Welder Element 120V 1600W-S



120V 1600W Replacement Heating Element. High temperature resistance alumina ceramic heating element use for handheld hot air tools.

1550W ST for newer ST model hand welders
1600W-S for older S model hand welders

Product No
8-HWE Weight (lbs)
0.3

Voltage: 120 V Power: 1600 W Type: 33
Diameter 26mm Weight: 0.1 kg Package: 1pcs

2" Silicon Leister Hand Roller



Silicone roofing roller that is Made in the USA. Perfect for any type of seam pressure rolling. High quality, heavy fork doesn't bend or twist from pressure anti-rust ball bearings for long lasting tool and smooth rolling
1-7/16" dia X 1-3/4" wide silicone roller

Product No
8-SHRHQ

Hand Welder Element 120V 1550W-ST



120V 1550W Replacement Heating Element. High temperature resistance alumina ceramic heating element use for hand held hot air tools.

1550W ST for newer ST model hand welders
1600W-S for older S model hand welders

Product No
8-HWSE Weight (lbs)
0.3

Voltage: 120 V Power: 1550 W Type: 33
Diameter 26mm Weight: 0.1 kg Package: 1pcs

Membrane Slitter



Hand held roofing membrane slitter tool for PVC membranes. Plastic Body with Large Gripper Handle. Replaceable Blades.

Product No
8-MSLTR

IB Bag of Rags



100% cotton loops with a 86% Cotton 14% Polyester base. A blended base with 100% cotton loops is the best of the best. You get absorbency plus durability. Irregular. Bright white and soft.

Product No
8-RAGS10


TOOLS

Orders

The Inside Sales team is here to support you in achieving your goals and ensuring the highest level of customer satisfaction. Available from 7:00 AM to 7:00 PM cst, here to ensure consistent and quality coordination of orders, assist with product and shipping inquiries, and address any special requests to meet customer needs.

Our focus is to work alongside you, maintaining clear communication and efficient processes to enhance the overall sales experience. Whether it's preparing quotes, managing order details, or troubleshooting challenges, we're dedicated to supporting your efforts and contributing to the shared success of IB Roof Systems.

Together, we aim to deliver exceptional service, accurate orders, and on-time deliveries, strengthening customer relationships and driving business growth. If you need assistance or have ideas to improve our collaboration, don't hesitate to reach out. Let's work as a team to exceed expectations!

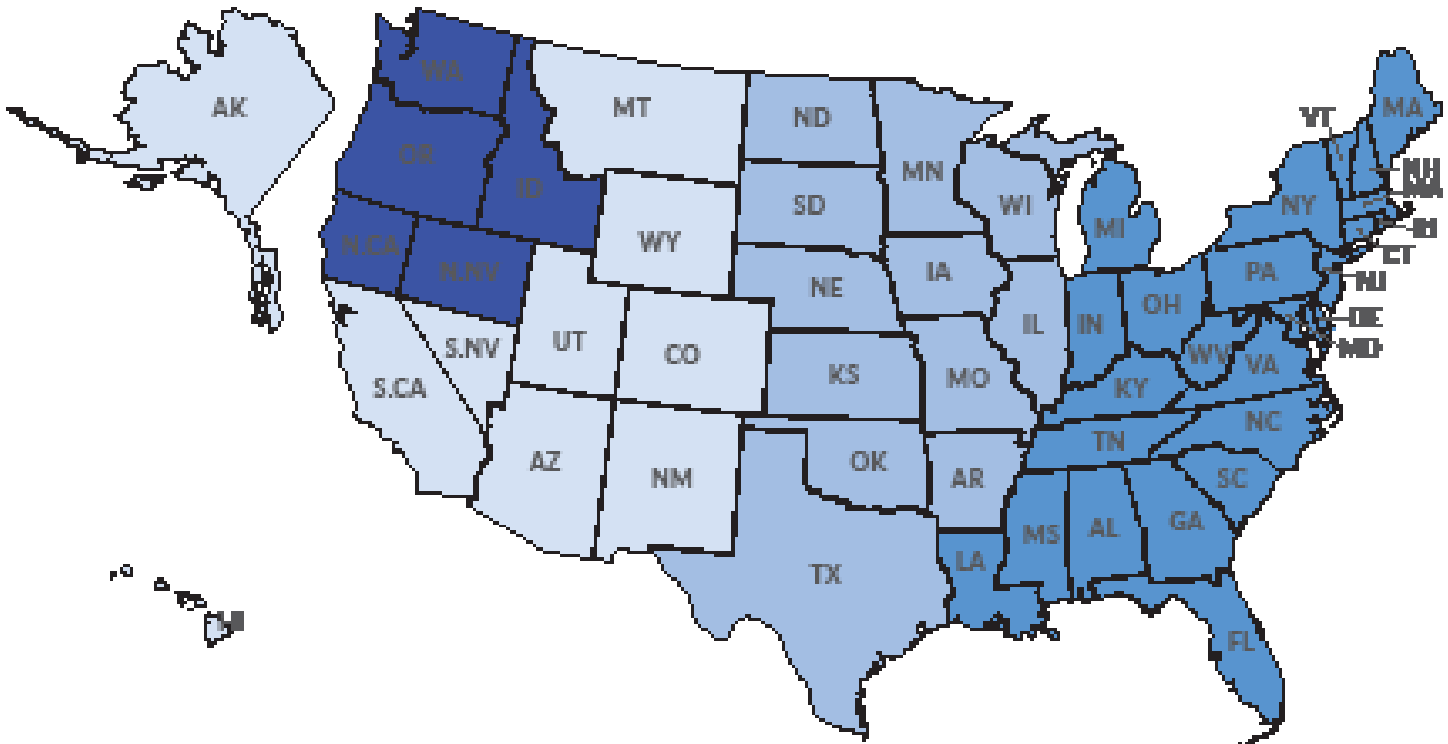

NORTHWEST

Email: Orders.NW@IBroof.com
Direct Line: 972.354.6635
(10am - 7pm cst)

SOUTHWEST

Email: Orders.SW@IBroof.com
Direct Line: 972.354.6637
(9am - 6pm cst)

CENTRAL

Email: Orders.CT@IBroof.com
Direct Line: 972.354.6605
(8am - 5pm cst)

EAST

Email: Orders.ET@IBroof.com
Direct Line: 972.354.6629
(7am - 4pm cst)

SHIPPING

Email: shipping@IBroof.com
Direct Line: 972.354.6630



Inside Sales Manager

Derrick White
Email: Derrick.White@IBroof.com
Direct Line: 682-800-7737

IB PRODUCT INSTALL VIDEOS

Come and Learn.

Want to learn how to install IB products? Visit our easy step by step product installation videos, which will help guide you on your next project.



Scan here to visit IB Product Install Videos.

IB SAMPLES/LITERATURE

Come and get it!


IB has spent extensive time and energy to have awesome samples and literature so you can better use for your client packages and proposals. The IB website www.IBroofGear.com has all of the materials you need to represent well in your market



Scan here to visit the website

Items for your use:

- Product samples
- Brochures
- Technical Information
- Tools
- Wearables and Branded Gear

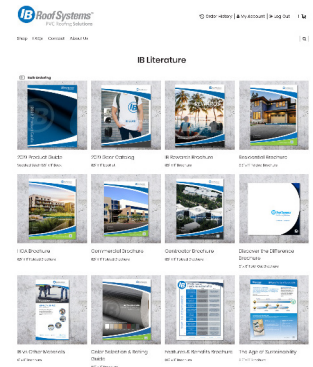

BRANDED GEAR

Looking Good!

Get the latest IB Gear so you can put your best foot forward when promoting IB. Select from a range of IB Jackets, Polo Shirts, T-shirts, Hats, Flashlights, and more.



Scan here to visit the gear website

Return Policy

1. Please contact IB Roof Systems' customer service department to discuss returns prior to returning any products to IB Roof Systems. This will ensure you receive IB's discounted shipping rates on the return and prevent any unnecessary shipping cost.
2. IB Roof Systems does not accept returns on product delivered over 90 days.
3. Prior to a credit being issued, all products will be inspected by the IB Roof Systems' Quality Assurance Manager, or an inspector. This may affect credit issued.
4. Product is credited to the billing account only. No refund checks will be issued. Third party accounts will not be credited.

Restock / Freight Fees

1. In situations where the wrong product was ordered, the wrong quantity was ordered or project changes, the customer will be responsible for:
 - a. Freight Out (If IB Roof Systems Paid)
 - b. Return Freight
 - c. Restocking fee of 20% - 30%
2. The customer, upon receiving an approval, is responsible for arranging prepaid freight back to our distribution center. We would request 24 hours' notice before delivery.

Special Orders

1. Products such as scupper, special flashing, special metal, insulation adhesive, and special run items are considered "special orders". There are no returns on "special orders."

IB Roof Systems Responsibility

1. IB Roof Systems will accept returns and responsibility on any product due to an:
 - a. Error in Order Entry
 - b. Error in Order Processing
 - c. Order released before ship date
 - d. Product arrived damaged
2. When IB Roof Systems is paying freight on a return we will arrange for trucking.
3. There will be no return on the following products:
 - a. Special order cones, scupper and Metal
 - b. Insulation
 - c. Adhesive, caulk, and coatings (due to short shelf life)
 - d. Taper system
 - e. Cricket systems
4. Any re-stocking fee can be between 20% - 30% depending on material condition. All ISO, EPS, and coverboard is 30% restocking fee to IB and manufacturers.

Freight Policy

2025 FREIGHT POLICY

Fulfillment Expectation

IB Roof Systems has been ambitious to build a network where your order can ship the same day or next from the regional IB distribution center closest to you or your project. IB has multiple shipping options that include truckload orders to small package.

Expectations of Customer Freight Charges

Small Parcel/UPS: Shipping is charged at the time of shipment.

LTL (Less Than Truckload): up to 4 Pallets

- Freight surcharge of \$50 applies to each LTL Shipment.
- LTL Freight is charged at the time of shipment & subject to additional fees as noted below.
 - * Overlength, appointment, residential, limited access, liftgate/pallet jack, etc.

FTL (Full Truckload) Embedded Freight: greater than 4 Pallets

- Included Materials: Membrane, Accessories, Coatings, Adhesives, Metals
 - * Additional Surcharges:
 - ** \$450.00 freight surcharge
 - ** \$100.00 per stop fee (for multiple pickups/deliveries)
 - ** \$100.00 per day hold fee (for extended transit)
 - ** Special equipment fees (e.g., liftgate, pallet jack) charged at cost.)

- Deficit Freight Charges:

* If a truck is not fully utilized (e.g., unused space or maximum weight reached), the following deficit charges will apply:

- ** Empty to ¼ full: \$1,000.00
- ** ¼ to ½ full: \$700.00
- ** ½ to ¾ full: \$400.00
- ** Full truck: \$0.00

FOR ORDERS EXCEEDING 400 SQUARES

IB Roof Systems may require up to 48 hours for processing. These orders will ship directly from our centralized distribution hub in Grapevine, TX, to your designated location or job site.


For any questions regarding our freight policy, please contact IB Roof Systems at:

- Phone: 800-426-1626
- Email: shipping@ibroof.com



All product details and information included this catalog is subject to change without notice. While IB Roof Systems makes every effort to provide the most accurate, up-to-date information, some items in our catalog may be incorrect. Please refer to corresponding technical data sheets for the most current details, and specifications of each product. IB Roof Systems is a Registered trade mark. ENERGY STAR is a registered trademark of the US government. LEED is a registered trademark of the U.S. Green Building Council.

MATERIALS MADE TO SHIP. TODAY.
CONTRACTOR TRAINING
EASIER HANDLING. FASTER. SAFER.
MORE COLORS - MORE OPPORTUNITIES
CUSTOM FABRICATED PRODUCTS

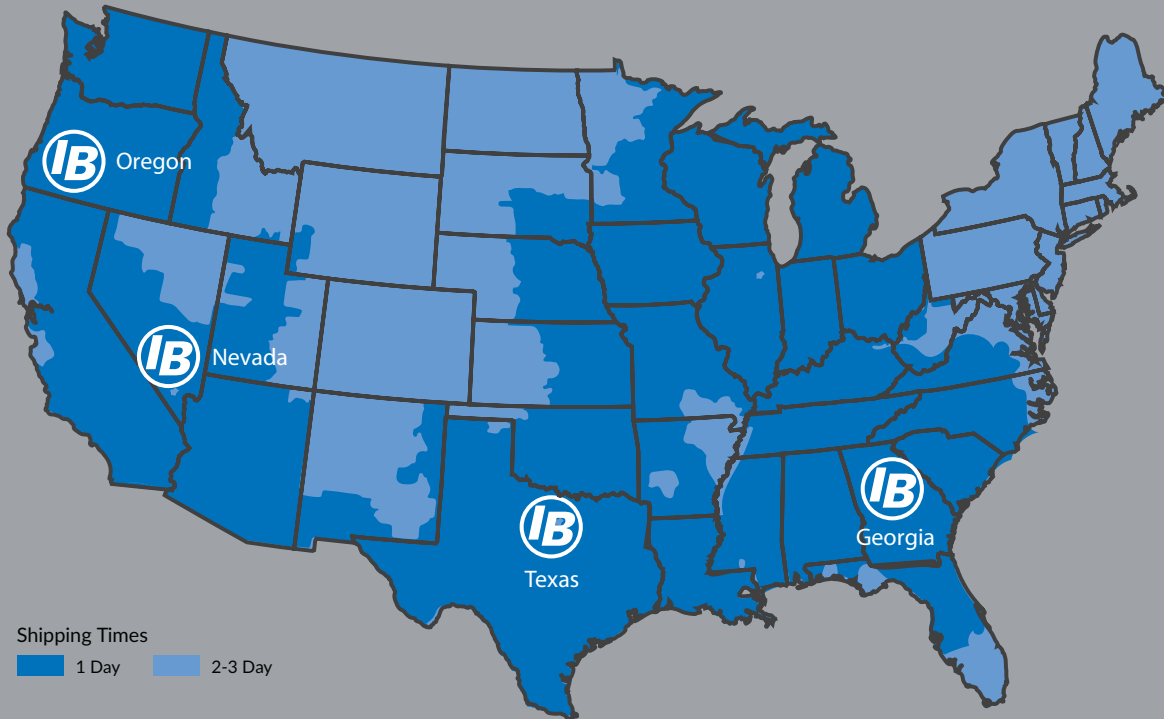

IBroof.com
800.426.1626

We Have You Covered.

Install IB with the confidence that you have selected the Industry's Best roofing materials. Through state of the art equipment and stringent quality control measures, we ensure that the products produced in our facilities throughout the United States meet the superior standards upon which we have built a reputation of excellence since 1978.

OREGON
5250 Highbanks Road
Suite 540
Springfield, OR 9747

NEVADA
2965 Lincoln Road
Las Vegas, NV 89115

TEXAS (HQ)
506 East. Dallas Rd.
Suite 300
Grapevine, TX 76051

GEORGIA
8110 Troon Cir Ste 180
Austell, GA 30168

Visit our
Website.

