


# Scale: Detail Name: NTS Low Profile Expansion Joint Submitted By: Address: Telephone: Detail Number: XD - 01



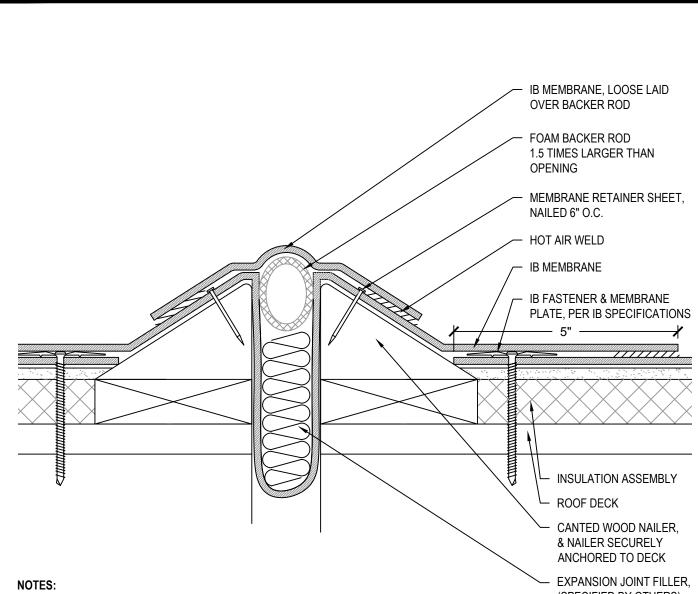

1. SECURE FLASHINGS AND METAL WORK IN ACCORDANCE WITH IB SPECIFICATIONS AND FLASHING SECURE PROPERTY ABILIERS)
APPROVED SUBSTRATE / SEPARATION:

NEW CONSTRUCTION - FULLY ADHERED, INDUCTION WELDED AND MECHANICALLY ATTACHED

1/2" PLYWOOD, 7/16" OSB, 1/2" APPROVED GYPSUM COVER BOARD, POURED / PRECAST CONCRETE, OR CEMENT BLOCK / MASONRY WALLS

MECHANICALLY ATTACHED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHINGS

FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD,1/4" APPROVED GYPSUM COVER BOARD, 7/16" OSB, OR APPROVED IB SEPARATION SHEET


INDUCTION WELDED RECOVER OVER APPROVED EXISTING WALL BASE FLASHINGS

- FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD, 1/4" APPROVED GYPSUM COVER BOARD, OR 7/16" OSB FULLY ADHERED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHINGS
- · FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD, 1/4" APPROVED GYPSYM COVER BOARD, OR 7/16" OSB

Scale: NTS	Detail Name:  Canted Curb Exp		Detail Number: XD - 02
Submitted By: Address: Telephone:		Project: Address:	





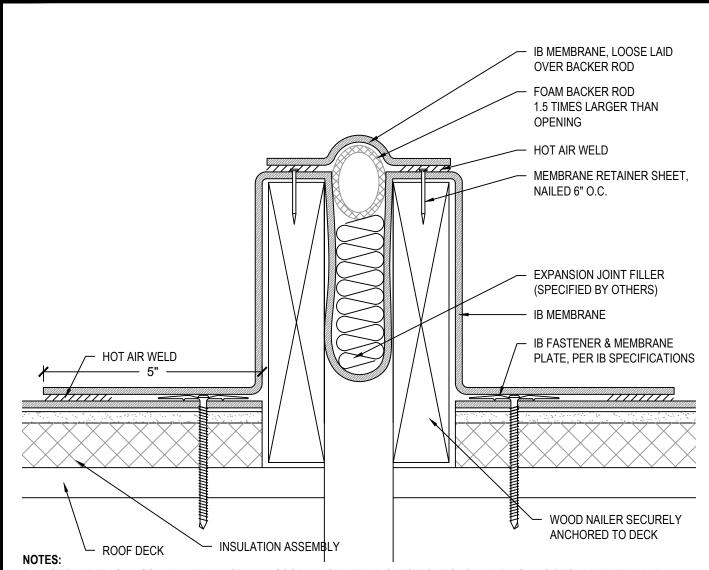

- SECURE FLASHINGS AND METAL WORK IN ACCORDANCE WITH IB SPECIFICATIONS AND FLASHING SECUREMENT TABLE.
- ADHERED WALLS: INSTALL MEMBRANE IN IB VERTIBOND ADHESIVE ADDING NOMINAL RATE OF 1 GAL. PER 60 SQ. FT. NET INSTALLED COVERAGE (50% TO SUBSTRATE ALLOW TO DRY WITH REMAINING 50% TO BACK OF SHEET, INSTALL WHILE TACKY)

### APPROVED SUBSTRATE / SEPARATION:

NEW CONSTRUCTION - FULLY ADHERED, INDUCTION WELDED AND MECHANICALLY ATTACHED

· 1/2" PLYWOOD, 7/16" OSB, 1/2" APPROVED GYPSUM COVER BOARD, POURED / PRECAST CONCRETE, OR CEMENT BLOCK / MASONRY WALLS

MECHANICALLY ATTACHED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHINGS


· FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD,1/4" APPROVED GYPSUM COVER BOARD, 7/16" OSB, OR APPROVED IB SEPARATION SHEET

INDUCTION WELDED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHING

- FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD, 1/4" APPROVED GYPSUM COVER BOARD, OR 7/16" OSB FULLY ADHERED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHINGS
- FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD, 1/4" APPROVED GYPSYM COVER BOARD, OR 7/16" OSB

Scale:	Detail Name: Curb to Curb Expa		Detail Number: <b>XD - 03</b>
	<u> </u>		AB 00
Submitte	J.	Project:	
Address: Telephone:		Address:	



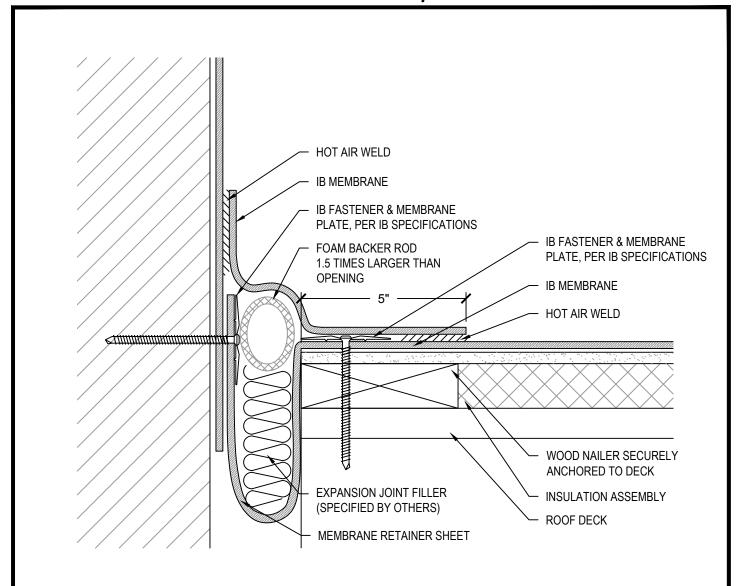

# NOTES:

### APPROVED SUBSTRATE / SEPARATION:

NEW CONSTRUCTION - FULLY ADHERED AND MECHANICALLY ATTACHED

· 1/2" PLYWOOD, 7/16" OSB, 1/2" APPROVED GYPSUM COVER BOARD, POURED / PRECAST CONCRETE, OR CEMENT BLOCK / MASONRY WALLS

MECHANICALLY ATTACHED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHINGS

• FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD,1/4" APPROVED GYPSUM COVER BOARD, 7/16" OSB, OR APPROVED IB SEPARATION SHEET


FULLY ADHERED RECOVER OVER APPROVED EXISTING WALL AND BASE FLASHINGS

FULL SEPARATION REQUIRED WITH MINIMUM 1/2" PLYWOOD, 1/4" APPROVED GYPSYM COVER BOARD, OR 7/16" OSB

Scale: NTS	Detail Name: Roof to Wa	II Expansion Joint	Detail Number: XD - 04
Submitted By: Address: Telephone:		Project: Address:	





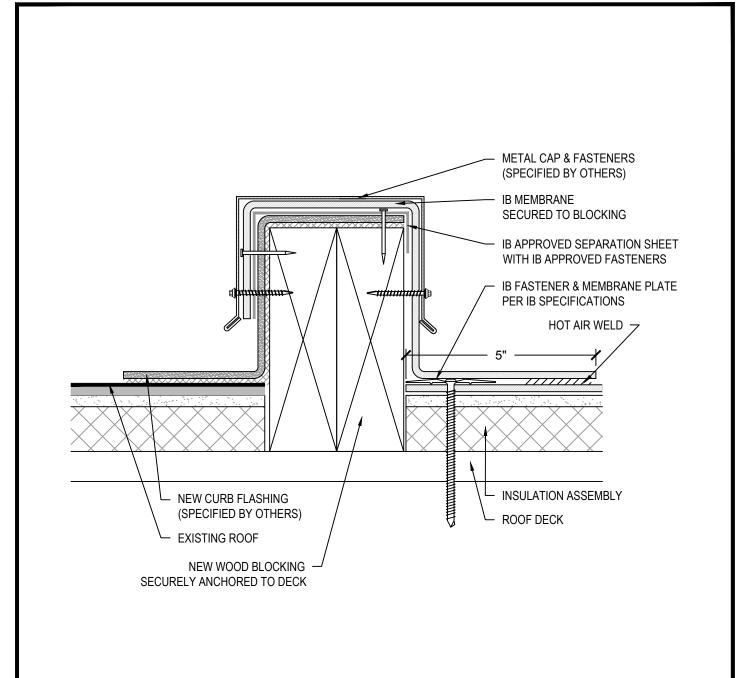


# NOTES:

- 1. TIE-IN BETWEEN IB ROOF MEMBRANES AND EXISTING NON-IB MATERIALS REQUIRE THE USE OF A CURBED AREA DIVIDER.
- 2. SECURE FLASHINGS AND METAL WORK IN ACCORDANCE WITH IB SPECIFICATIONS AND FLASHING SECUREMENT TABLE.

Scale:	Detail Name:		Detail Number:
NTS	Area Divider		XD - 05
Submitted By: Address:		Project: Address:	
Telephone:		Addiess.	



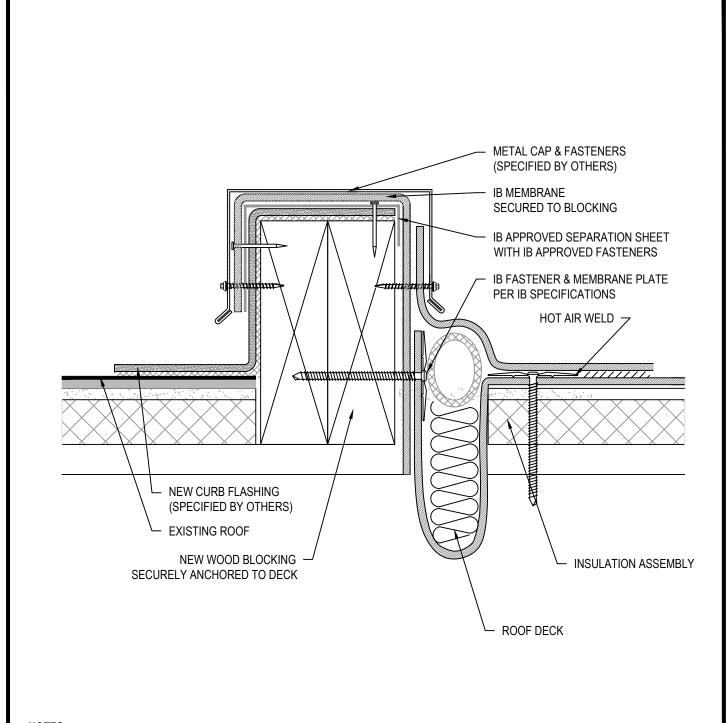

# NOTES:

- 1. TIE-IN BETWEEN IB ROOF MEMBRANES AND EXISTING NON-IB MATERIALS REQUIRE THE USE OF A CURBED AREA DIVIDER.
- 2. SECURE FLASHINGS AND METAL WORK IN ACCORDANCE WITH IB SPECIFICATIONS AND FLASHING SECUREMENT TABLE.

Scale: NTS	Detail Name:  Roof to Curb Expansion Joint	Detail Number: XD - 06
Submitte Addre Telepho	ss: Address:	