




IB Acrylic HT Top Coat - Acrylic Base Coat - Existing Roof - aged EPDM Single Ply

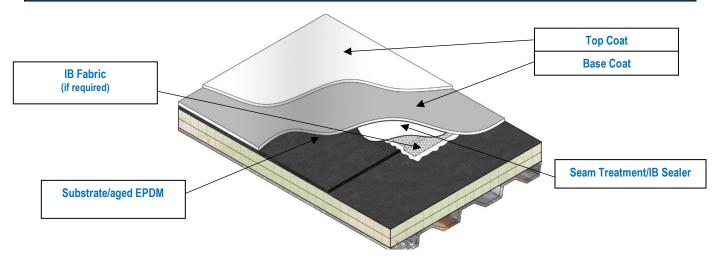

Labor Steps	Step 1	Step 2	Step 3	Step 4 Reflective Coat	
	Clean Roof	Seam Treatment	Base Coat		
Products	10 mars	M Sealer	St marks	W man	

HT-EX-EPDM								
Spec #	Step 1	Step 2	Step 3	Step 4	Required Dry	Warranty		
	Surface Preparation	Seam Treatment	Base Coat	Reflective Coat*	Mil	Length		
	IB EPDM Cleaner	IB Sealer	IB Acrylic Pro	IB Acrylic HT	Thickness			
HT-EX-EPDM-5	1 gal/400 sq. ft.	55 Wet Mils	1.0 gal/square	1.0 gal/square	17	5 year		
HT-EX-EPDM-10	1 gal/400 sq. ft.	55 Wet Mils	1.0 gal/square	1.25 gal/square	20	10 year		
HT-EX-EPDM-12	1 gal/400 sq. ft.	55 Wet Mils	1.25 gal/square	1.5 gal/square	24	12 year		
HT-EX-EPDM-15	1 gal/400 sq. ft.	55 Wet Mils	1.75 gal/square	1.75 gal/square	30	15 year		

^{*}Acrylic HT coating may be applied in one (1) coat (single pass) up to 1.75 gal/square per pass. Where rate exceeds 1.75 gal/square, the coating shall be applied in two (2) coats (two passes).

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Coating Specifications Manual. For Technical Services please contact us at 800-426-1626.

Note: Coverage rates may vary due to substrate porosity and/or irregularity of the roof surface.

Reflective Coating		Colors	Warranties
☐ IB Acrylic HT Coating (Reflective Coat)	□White □Tan	□ Gray	□ Warranty Plus □ Limited Material
Submitted By: Company: Email:		Project Name: Address:	