




IB Acrylic HT Top Coat – Acrylic Base Coat – Existing Metal Roof Panel

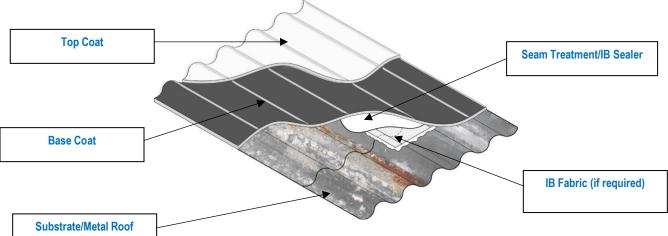

Labor	Step 1	Step 2	Step 3	Step 4	Step 5
Steps	Clean Roof	Rust Treatment	Seam Treatment	Base Coat	Reflective Coat
Product		10 Adjun	B Sealer		

Spec #	Step 1	Step 2	Step 3	Step 4	Step 5	Required Dry Mil Thickness	Warranty Length
	Surface Preparation IB Roof Cleaner Concentrate (diluted 9:1)	Rust Treatment	Seam Treatment	Base Coat IB Acrylic Pro or IB Acrylic HT	Reflective Coat* IB Acrylic HT		
HT-EX-MRP-10	1 gal/150 sq. ft.	0.5 gal/square	55 Wet Mils	1.0 gal/square	1.25 gal/square	20	10 year
HT-EX-MRP-12	1 gal/150 sq. ft.	0.5 gal/square	55 Wet Mils	1.25 gal/square	1.5 gal/square	24	12 year
HT-EX-MRP-15	1 gal/150 sq. ft.	0.5 gal/square	55 Wet Mils	1.75 gal/square	1.75 gal/square	30	15 year

*Acrylic HT coating may be applied in one (1) coat (single pass) up to 1.75 gal/square per pass. Where rate exceeds 1.75 gal/square, the coating shall be applied in two (2) coats (two passes).

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Coating Specifications Manual. For Technical Services please contact us at 800-426-1626.

Note: Coverage rates may vary due to substrate porosity and/or irregularity of the roof surface.

Reflective Coating	Colors		Warranties	
□ IB Acrylic HT Coating (Reflective Coat) □White		1Tan 🗆 Gray	UWarranty Plus D Limited Material	
Submitted By: Company: Email:		Project Name: Address:		