


Fully Adhered Membrane - Insulation(RB) - Vapor Barrier - Concrete (New or Tear-Off)

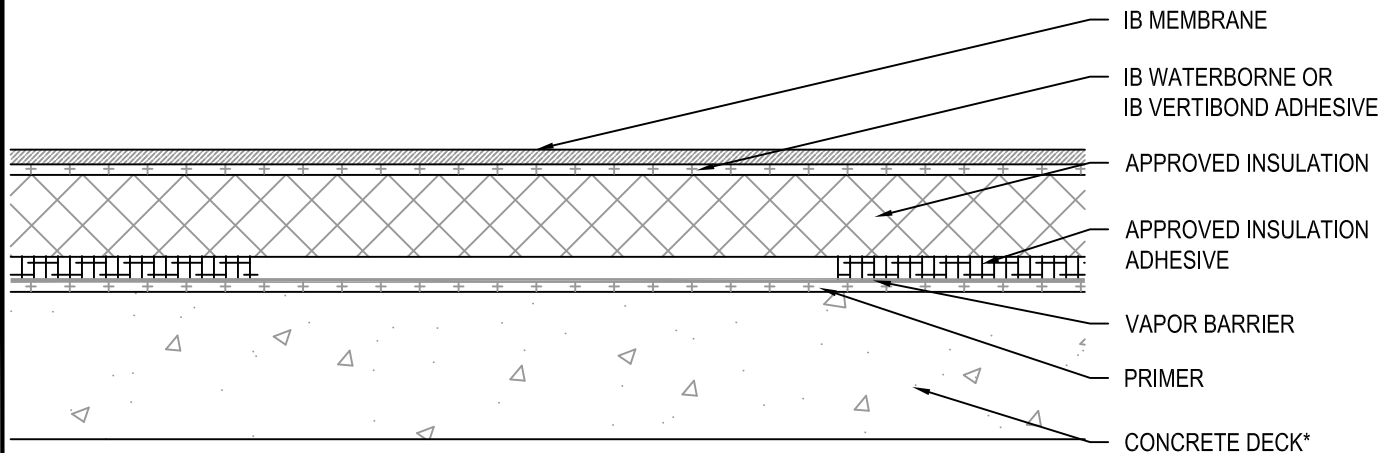

Fire Rating / Max. Slope	Deck Type	Primer	Vapor Barrier	Insulation			IB Membrane Attachment	Max. Design Pressure**
				Type	Insulation Adhesive	Attachment		
<input type="checkbox"/> Class 'A' 2" : 12"	Structural Concrete	Elastocol Stick or Elastocol Stick Zero	Soravap'r	Approved Insulation	IB Rapid Set Insulation Adhesive	Four continuous ribbons, Min. 1/2" to 3/4" wide 12" o.c.	IB Waterborne or IB Vertibond Adhesive	-290.0 psf (Class 580)
<input type="checkbox"/> Class 'A' 2" : 12"	Structural Concrete	Elastocol Stick or Elastocol Stick Zero	Sopravap'r	Approved Insulation	OlyBond 500 (Spotshot) Insulation Adhesive	Four continuous ribbons, Min. 3/4" to 1" wide 12" o.c.	IB Waterborne or IB Vertibond Adhesive	-290.0 psf (Class 580)

Approved Insulation: IB Energy Board II & III or IB Approved UL Classified Polyisocyanurate Insulation, minimum 1" thickness.

Primer: Apply at a nominal rate of 1 gal. per 100 sq. ft.

** Refer to Substrate Resistance table for required pull-out values.

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Specifications Manual. For Technical Services please contact us at 800-426-1626.

Membranes:	Colors:	Warranties:	Warranty Lengths:
<input type="checkbox"/> 50 Mil Membrane	<input type="checkbox"/> White* <input type="checkbox"/> Cool Sand* <input type="checkbox"/> ChemGuard*	<input type="checkbox"/> Total System (NDL)	<input type="checkbox"/> 10 yr (50, 60, and 80 mil)
<input type="checkbox"/> 60 Mil Membrane	<input type="checkbox"/> Gray <input type="checkbox"/> Green <input type="checkbox"/> Red	<input type="checkbox"/> Warranty Plus	<input type="checkbox"/> 15 yr (50, 60, and 80 mil)
<input type="checkbox"/> 80 Mil Membrane	<input type="checkbox"/> Tan <input type="checkbox"/> Brown <input type="checkbox"/> Custom: _____	<input type="checkbox"/> Commercial Limited Material	<input type="checkbox"/> 20 yr (60 and 80 mil)
	* Meets CRRC, Title-24, & EnergyStar Standards	<input type="checkbox"/> Lifetime Residential Limited Material	<input type="checkbox"/> 25 yr (80 mil)

Submitted By: Address: Telephone:	Project Name: Address:
--	----------------------------------

