




Fully Adhered Membrane - Cover Board (RB) - Insulation (RB) - Existing Roof - Lightweight Insulating Concrete - (Recover)

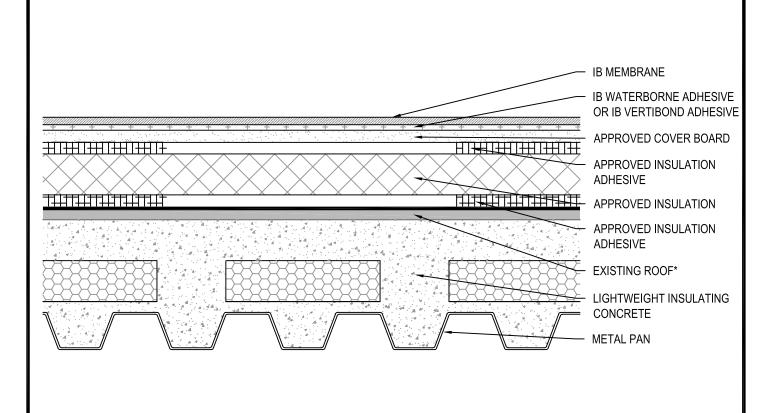

Fire Rating / Max. Slope		Deck Type	Cover Board / Insulation (over Existing Roof)			IB Membrane	Max. Design
			Туре	Insulation Adhesive	Attachment	Attachment	Pressure**
	Class 'A' Unlimited	LWIC / Metal Pan	Approved Cover Board & Approved Insulation	Olybond 500 (Spotshot) Insulation Adhesive	Four continuous ribbons, Min. 3/4" to 1" wide 12" o.c.	IB Waterborne or IB Vertibond Adhesive	-120.0 psf (Class 240)
	Class 'A' Unlimited	LWIC / Metal Pan	Approved Cover Board & Approved Insulation	IB Rapid Set Insulation Adhesive	Four continuous ribbons, Min. 1/2" to 3/4" wide 12" o.c.	IB Waterborne or IB Vertibond Adhesive	-232.5 (Class 465)

Approved Cover Board: Dens Deck Prime, Securock Gypsum-Fiber Roof Board, minimum 1/4" thickness.

Approved Insulation: IB Energy Board II & III or IB Approved UL Classified Polyisocyanurate Insulation, minimum 1.5" thickness.

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Specifications Manual. For Technical Services please contact us at 800-426-1626.

Membranes:	Colors:	Warranties:	Warranty Lengths:	
50 Mil Membrane 60 Mil Membrane 80 Mil Membrane	White* Cool Sand* ChemGuard* Gray Green Red Tan Brown Custom:  * Meets CRRC, Title-24, & EnergyStar Standards	Total System (NDL) Warranty Plus Commercial Limited Material Lifetime Residential Limited Material	10 yr (50, 60, and 80 mil) 15 yr (50, 60, and 80 mil) 20 yr (60 and 80 mil) 25 yr (80 mil)	
Submitted By: Address: Telephone:		Project Name: Address:		















<sup>\*</sup> Existing Roof: SBS or APP modified, or oxidized asphalt smooth coated, mineral surfaced roofing system.

<sup>\*\*</sup> Refer to Substrate Resistance table for required pull-out values.