


Fully Adhered Membrane - Cover Board (RB) - Insulation (RB) - Wood Deck (New or Tear-Off)

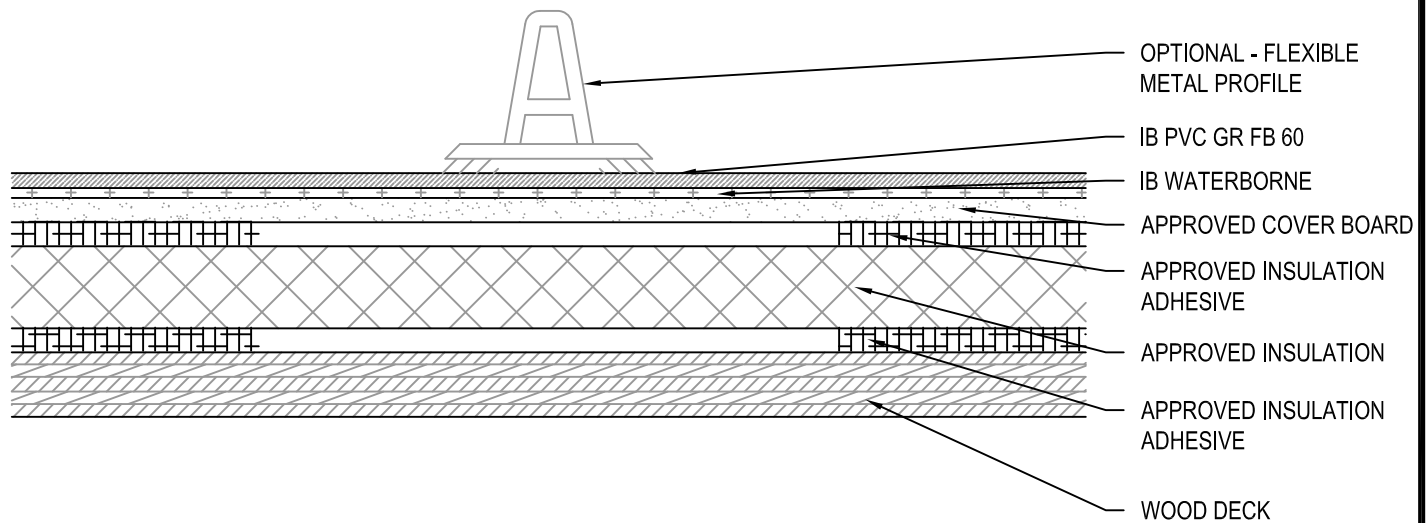

Fire Rating / Max. Slope	Deck Type	Cover Board / Insulation			IB Membrane Attachment	Max. Design Pressure**
		Type	Insulation Adhesive	Attachment		
<input type="checkbox"/> Class 'A' Unlimited	1/2" Plywood	Approved Cover Board & Approved Insulation	IB Rapid Set Insulation Adhesive	Four continuous ribbons, Min. 1/2" to 3/4" wide, 12" o.c.	IB Waterborne	Minimum Req. for IB Warranty
<input type="checkbox"/> Class 'A' Unlimited	1/2" Plywood	Approved Cover Board & Approved Insulation	OlyBond 500 (Spotshot) Insulation Adhesive	Four continuous ribbons, Min. 3/4" to 1" wide, 12" o.c.	IB Waterborne	Minimum Req. for IB Warranty

Approved Cover Board: Dens Deck Prime, Securock Gypsum-Fiber Roof Board, minimum 1/4" thickness.
Approved Insulation: IB Energy Board II & III or IB Approved UL Classified Polyisocyanurate, minimum 1" thickness.
 Expanded Polystyrene, Extruded Polystyrene Insulation, minimum 1.5" thickness.

** Refer to Substrate Resistance table for required pull-out values.

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Specifications Manual. For Technical Services please contact us at 800-426-1626.

Membranes:	Colors:	Warranties:	Warranty Lengths:
<input type="checkbox"/> IB PVC GR FB 60	<input type="checkbox"/> White* <input type="checkbox"/> Aluminum <input type="checkbox"/> Old World Bronze <small>* Meets CRRC, Title-24, & EnergyStar Standards</small>	<input type="checkbox"/> Total System (NDL) <input type="checkbox"/> Warranty Plus <input type="checkbox"/> Commercial Limited Material <input type="checkbox"/> Lifetime Residential Limited Material	<input type="checkbox"/> 10 yr <input type="checkbox"/> 15 yr <input type="checkbox"/> 20 yr

Submitted By:
 Address:
 Telephone:

Project Name:
 Address:

